

LORO-X OFFSET BEND 75 MM DN 50

LORO-X offset bend 75 mm DN 50

Beskrivning

LORO-X offset bend made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, offset 75 mm, DN50




Artikeldata

EAN-kod	4038088020012
ETIM-klass	EC003024
Nominell diameter	DN 50
Yttermått (HxBxL)	63 x 133 x 320 mm
Vikt	0,70 Kg (STK)
Produktgrupp	1
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Durch den Versprung ist der Etagenbogen z.B. bei Falleitungen zur Überbrückung von Mauer- und Putzvorsprüngen bestens geeignet.

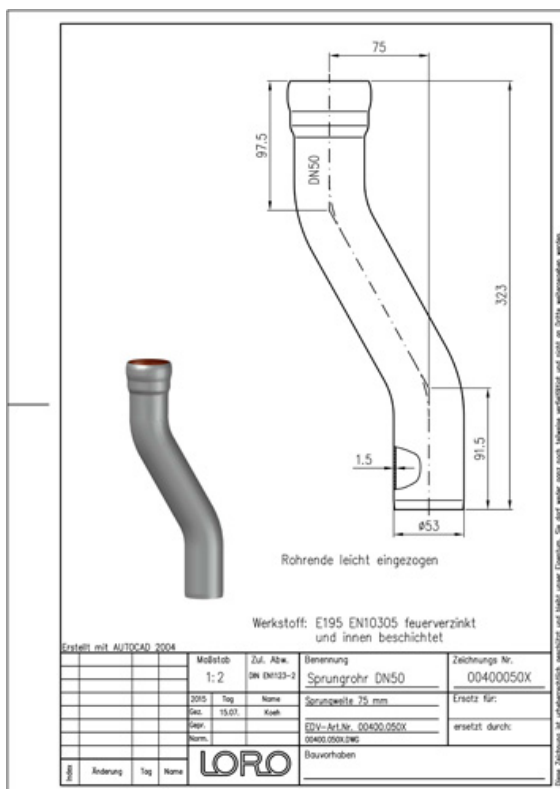

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)