
# LORO-X DOUBLE SOCKET DN 40

**LORO-X double socket DN 40**

## Beskrivelse

LORO-X double socket, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN40



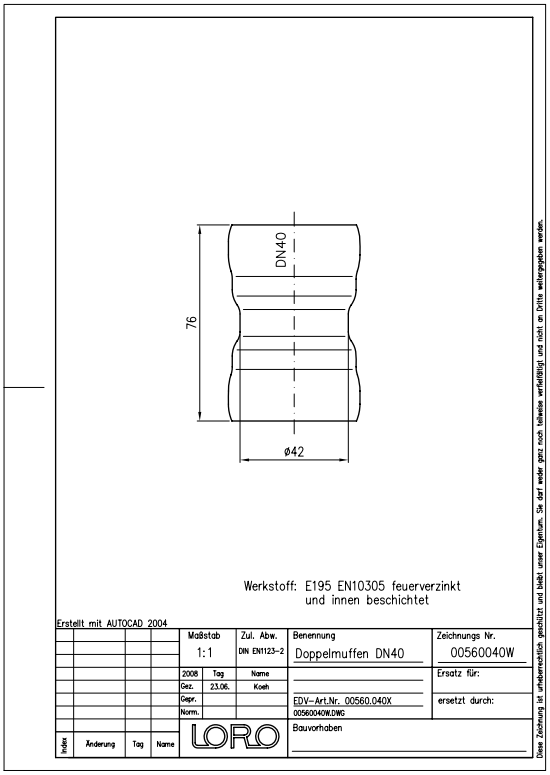


## Artikeldata

| | |
|---|---|
| **EAN-kode** | **4038088024294** |
| **ETIM Klasse** | **EC003024** |
| **Nominel diameter** | **DN 40** |
| **Ydermål (HxBxL)** | **51 x 51 x 76 mm** |
| **Vægt** | **0,10 Kg (STK)** |
| **Produktgruppe** | **1** |
| **Toldtarifnummer** | **73089098** |
| **Materiale / Farve** | **Stahl feuerverzinkt, Silber** |

## Brugsanvisning

Sollte nach dem Ablängen ein Rohrstück ohne Muffe anfallen, so kann es durch die LORO-X Doppelmuffe wieder zu einem Muffenrohr ergänzt werden. Die Doppelmuffe sollte auf das Restrohr mit dem LORO-X Dichtelement und dem LORO-X Kleber aufgeklebt werden. (In frostgefährdeten Bereichen sind gegen die Fließrichtung gerichtete Muffen, auch Doppelmuffen, nicht zulässig)

## Downloads

Alles online

Installationsvejledning (PDF)
Certifikat (PDF)
Måltegning (PDF)
CAD 2D (DXF)
Brochure (PDF)
CAD (DWG)