

## LORO-X TRANSITION PIPE ECCENTRIC DN 40/50

LORO-X eccentric transition pipe DN 40/50

### Beskrivelse

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN40/50




### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088027424               |
| ETIM-klasse           | EC003024                    |
| Nominell diameter     | DN 40, DN 50                |
| Utvendige mål (HxBxL) | 58 x 53 x 140 mm            |
| Vekt                  | 0,30 Kg (STK)               |
| Produktgruppe         | 1                           |
| Tolltariffnummer      | 73089098                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

### Bruksanvisning

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

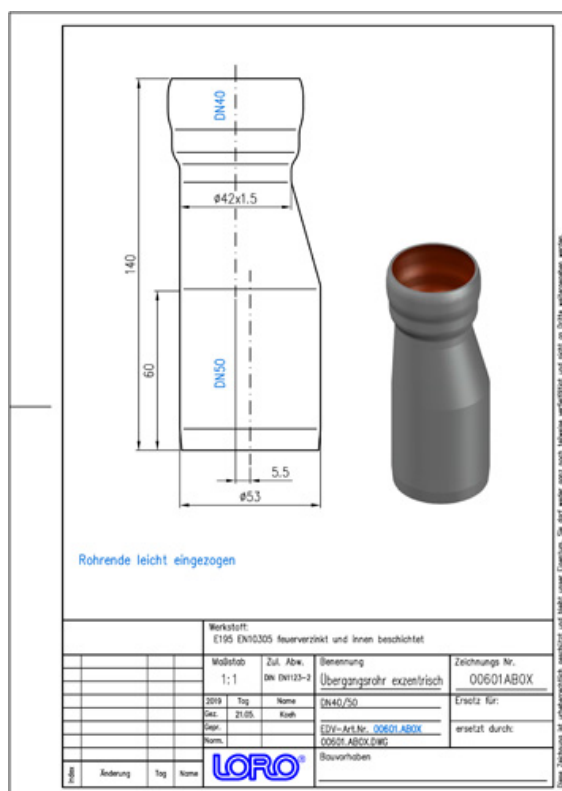

### Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måltegning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brosjyre \(PDF\)](#)

[CAD 3D \(DWG\)](#)