

## LORO-X TRANSITION PIPE ECCENTRIC DN 50/100

## LORO-X eccentric transition pipe DN 50/100

## Beskrivelse

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN50/100




## Artikeldata

|                          |                                    |
|--------------------------|------------------------------------|
| <b>EAN-kode</b>          | <b>4038088027462</b>               |
| <b>ETIM Klasse</b>       | <b>EC003024</b>                    |
| <b>Nominel diameter</b>  | <b>DN 50, DN 100</b>               |
| <b>Ydermål (HxBxL)</b>   | <b>102 x 107 x 172 mm</b>          |
| <b>Vægt</b>              | <b>1,00 Kg (STK)</b>               |
| <b>Produktgruppe</b>     | <b>1</b>                           |
| <b>Toldtarifnummer</b>   | <b>73089098</b>                    |
| <b>Materiale / Farve</b> | <b>Stahl feuerverzinkt, Silber</b> |

## Brugsanvisning

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentratisch "nach unten" erfolgen.

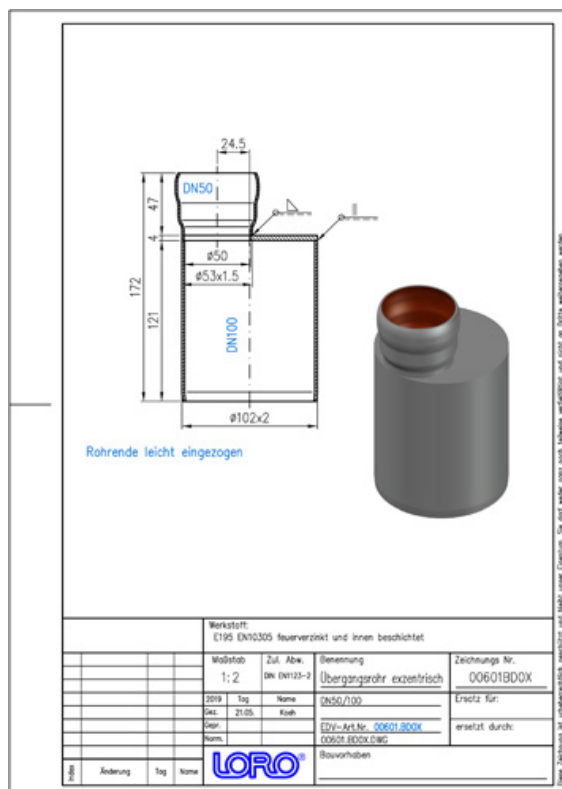

## Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[Certifikat \(PDF\)](#)

### BIM 3D (STEP)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

CAD 3D (DWG)