
LORO-X TRANSITION PIPE ECCENTRIC DN 50/100

LORO-X eccentric transition pipe DN 50/100

Popis

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN50/100



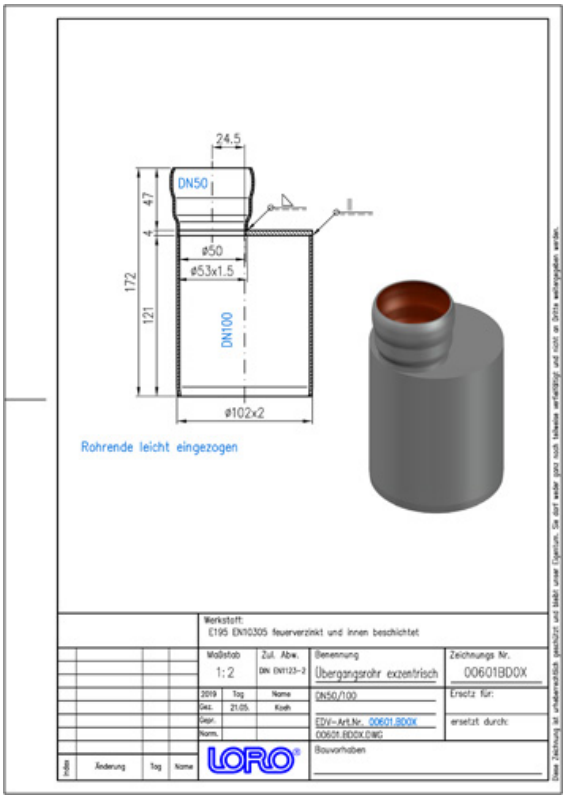

Údaje o artiklu

EAN kód	4038088027462
ETIM třída	EC003024
Jmenovitý průměr	DN 50, DN 100
Vnější rozměry (VxŠxD)	102 x 107 x 172 mm
Hmotnost	1,00 Kg (STK)
Skupina produktů	1
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagerecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzenrisch "nach unten" erfolgen.

Ke stažení

Alles online

Návod k instalaci (PDF)
Certifikát (PDF)
BIM 3D (STEP)
Výkres rozměrů (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Prospekt (PDF)
CAD 3D (DWG)