LORO-X TRANSITION PIPE ECCENTRIC DN 100/125

LORO-X eccentric transition pipe DN 100/125

Beskrivning

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125

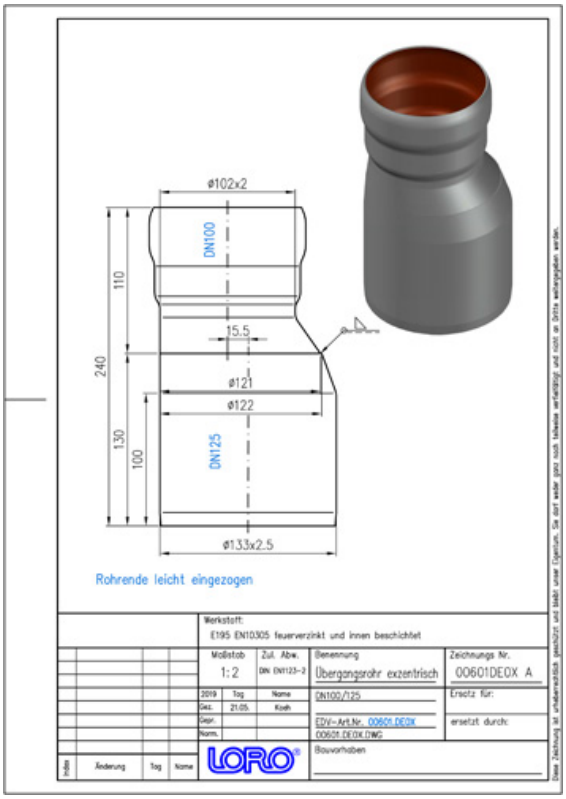

Artikeldata

EAN-kod	**4038088027509**
ETIM-klass	**EC003024**
Nominell diameter	**DN 100, DN 125**
Yttermått (HxBxL)	**133 x 141 x 240 mm**
Vikt	**1,70 Kg (STK)**
Produktgrupp	**1**
Tullnummer	**73089098**
Material / Färg	**Stahl feuerverzinkt, Silber**

Användningsanvisning

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagerecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzenrisch "nach unten" erfolgen.

Nedladdningar

Alles online

Monteringsanvisning (PDF)
Godkännande (PDF)
BIM 3D (STEP)
Måttritning (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Broschyr (PDF)
CAD 3D (DWG)
BIM Revit (RFA)