

LORO-X TRANSITION PIPE ECCENTRIC

DN 100/125

LORO-X eccentric transition pipe DN 100/125

Descriere

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125




Date articol

Cod EAN	4038088027509
Clasă ETIM	EC003024
Diametru nominal	DN 100, DN 125
Dimensiuni exterioare (ÎxLxA)	133 x 141 x 240 mm
Greutate	1,70 Kg (STK)
Grupă de produse	1
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

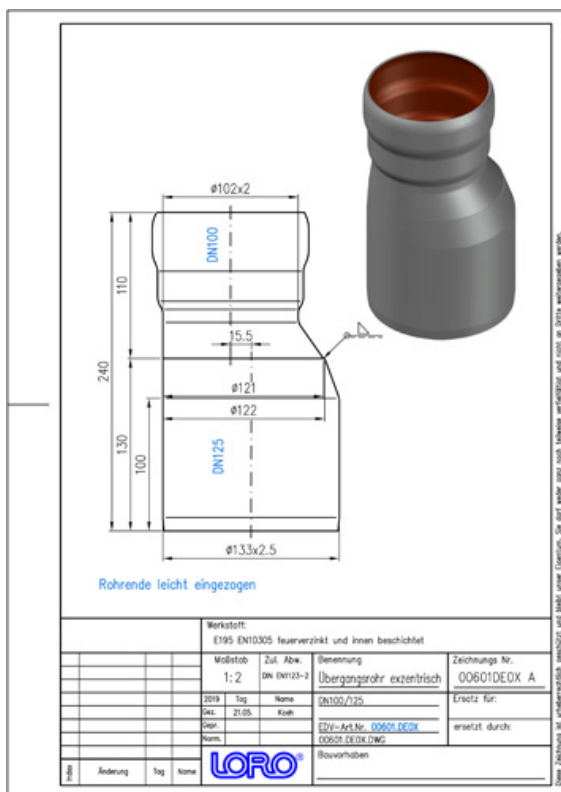

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Desen CAD \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broșură \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)