

## LORO-X TRANSITION PIPE ECCENTRIC

## DN 100/125

### LORO-X eccentric transition pipe DN 100/125

#### Opis

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125




#### Podatki o izdelku

|                           |                             |
|---------------------------|-----------------------------|
| EAN koda                  | 4038088027509               |
| ETIM razred               | EC003024                    |
| Nazivni premer            | DN 100, DN 125              |
| Zunanje mere (VxŠxD)      | 133 x 141 x 240 mm          |
| Teža                      | 1,70 Kg (STK)               |
| Skupina izdelkov          | 1                           |
| Carinska tarifna številka | 73089098                    |
| Material / Barva          | Stahl feuerverzinkt, Silber |

#### Opomba za uporabo

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

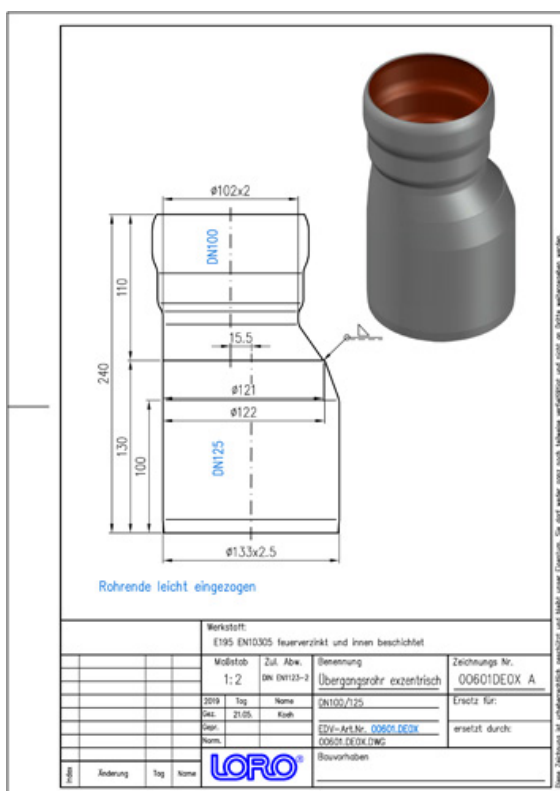

#### Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Merska risba \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)