

LORO-X TRANSITION PIPE ECCENTRIC

DN 100/125

LORO-X eccentric transition pipe DN 100/125

Beskrivelse

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125




Artikeldata

EAN-kode	4038088027509
ETIM Klasse	EC003024
Nominel diameter	DN 100, DN 125
Ydermål (HxBxL)	133 x 141 x 240 mm
Vægt	1,70 Kg (STK)
Produktgruppe	1
Toldtarifnummer	73089098
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentratisch "nach unten" erfolgen.

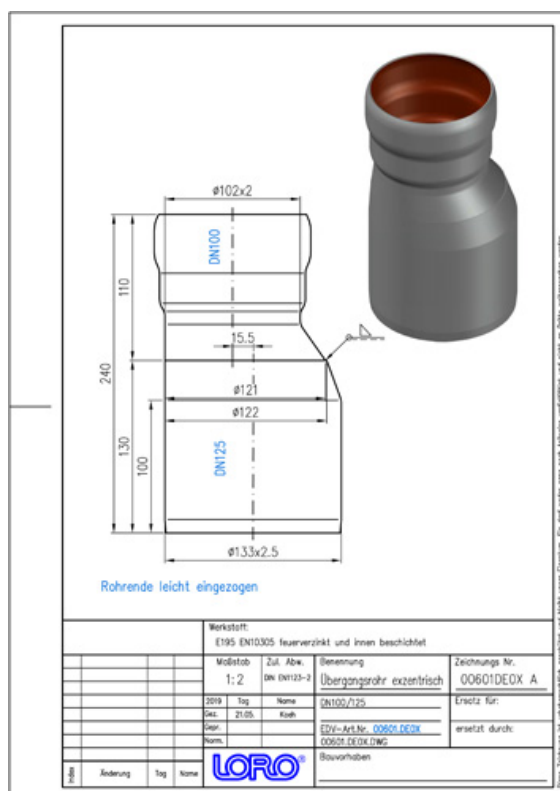

Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[Certifikat \(PDF\)](#)

BIM 3D (STEP)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)