

LORO-X TRANSITION PIPE ECCENTRIC

DN 100/125

LORO-X eccentric transition pipe DN 100/125

Beskrivelse

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125




Artikkeldata

EAN-kode	4038088027509
ETIM-klasse	EC003024
Nominell diameter	DN 100, DN 125
Utvendige mål (HxBxL)	133 x 141 x 240 mm
Vekt	1,70 Kg (STK)
Produktgruppe	1
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

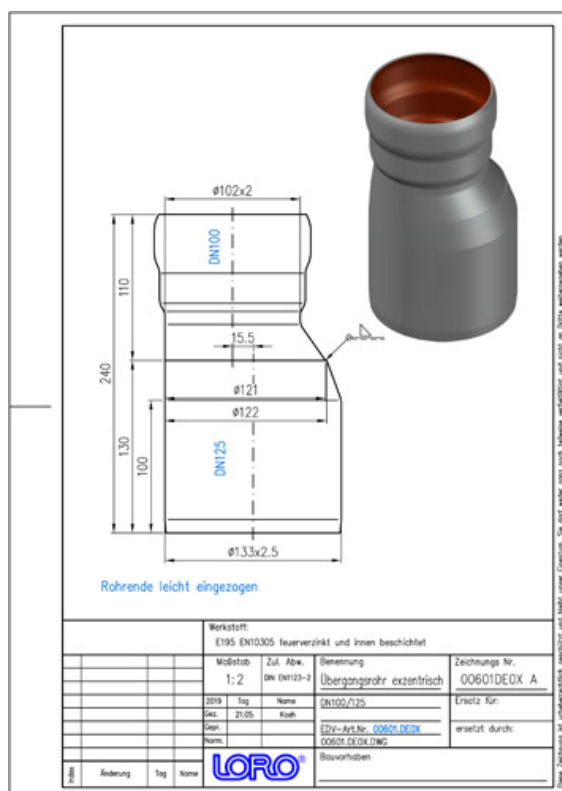

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

BIM 3D (STEP)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brosjyre \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)