

LORO-X TRANSITION PIPE ECCENTRIC

DN 125/150

LORO-X eccentric transition pipe DN 125/150

Beskrivning

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150




Artikeldata

EAN-kod	4038088027523
ETIM-klass	EC003024
Nominell diameter	DN 125, DN 150
Yttermått (HxBxL)	159 x 169 x 252 mm
Vikt	2,40 Kg (STK)
Produktgrupp	1
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentratisch "nach unten" erfolgen.

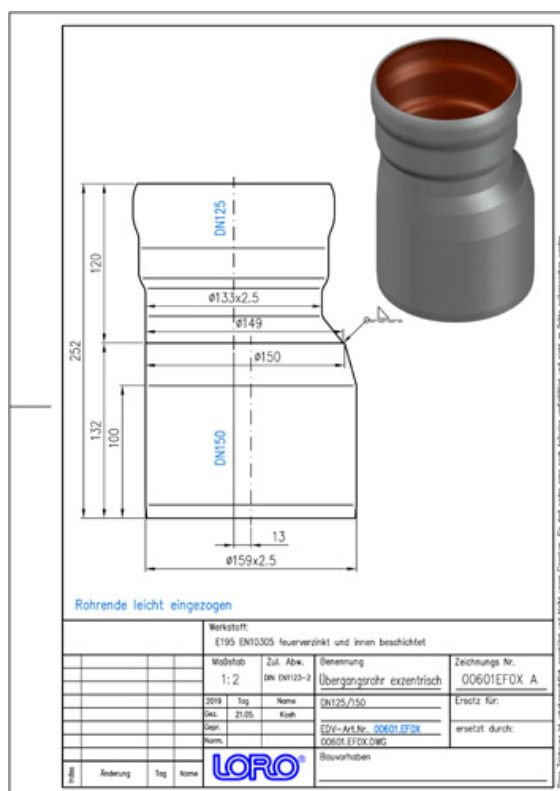

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

BIM 3D (STEP)

[Måttitning \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Broschyr \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)