

LORO-X TRANSITION PIPE ECCENTRIC

DN 125/150

LORO-X eccentric transition pipe DN 125/150

Kuvaus

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150




Tuotetiedot

EAN-koodi	4038088027523
ETIM-luokka	EC003024
Nimellishalkaisija	DN 125, DN 150
Ulkomitat (KxLxS)	159 x 169 x 252 mm
Paino	2,40 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentratisch "nach unten" erfolgen.

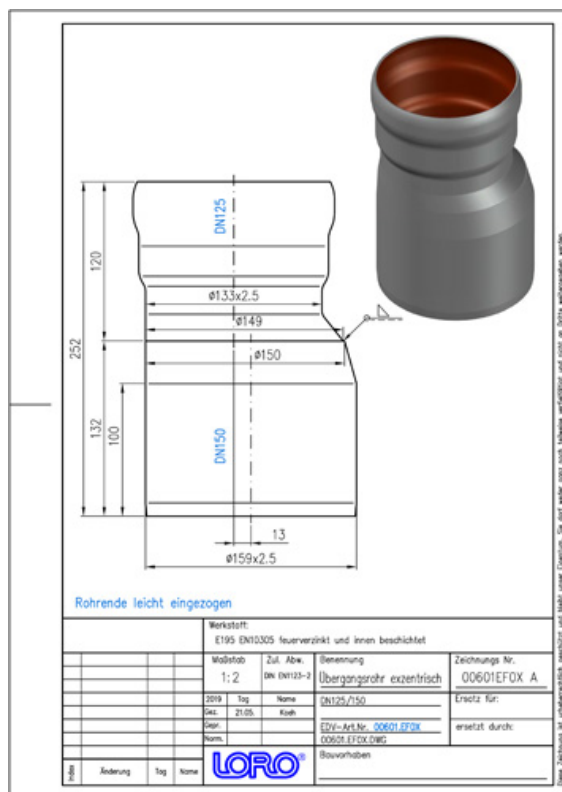

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

Hvåksyntå (PDF)

BIM 3D (STEP)

[Mittapiirustus \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Esite \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)