
LORO-X TRANSITION PIPE ECCENTRIC DN 125/150

LORO-X eccentric transition pipe DN 125/150

Opis

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150



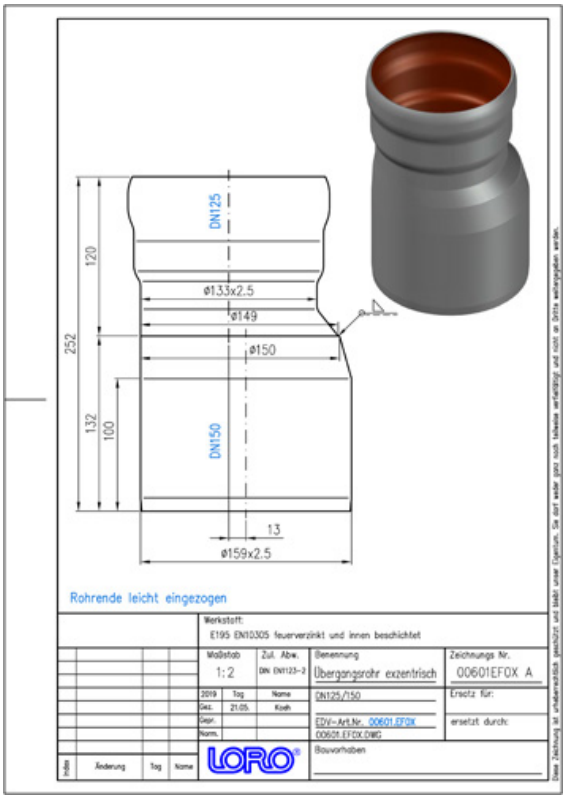

Podatki o izdelku

EAN koda	**4038088027523**
ETIM razred	**EC003024**
Nazivni premer	**DN 125, DN 150**
Zunanje mere (VxŠxD)	**159 x 169 x 252 mm**
Teža	**2,40 Kg (STK)**
Skupina izdelkov	**1**
Carinska tarifna številka	**73089098**
Material / Barva	**Stahl feuerverzinkt, Silber**

Opomba za uporabo

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagerecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzenrisch "nach unten" erfolgen.

Prenosi

Alles online

Navodila za vgradnjo (PDF)
Certifikat (PDF)
BIM 3D (STEP)
Merska risba (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Prospekt (PDF)
CAD 3D (DWG)
BIM Revit (RFA)