

LORO-X TRANSITION PIPE ECCENTRIC

DN 125/150

LORO-X eccentric transition pipe DN 125/150

Popis

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150




Údaje o artikli

EAN kód	4038088027523
ETIM trieda	EC003024
Menovitý priemer	DN 125, DN 150
Vonkajšie rozmery (VxŠxH)	159 x 169 x 252 mm
Hmotnosť	2,40 Kg (STK)
Skupina produktov	1
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

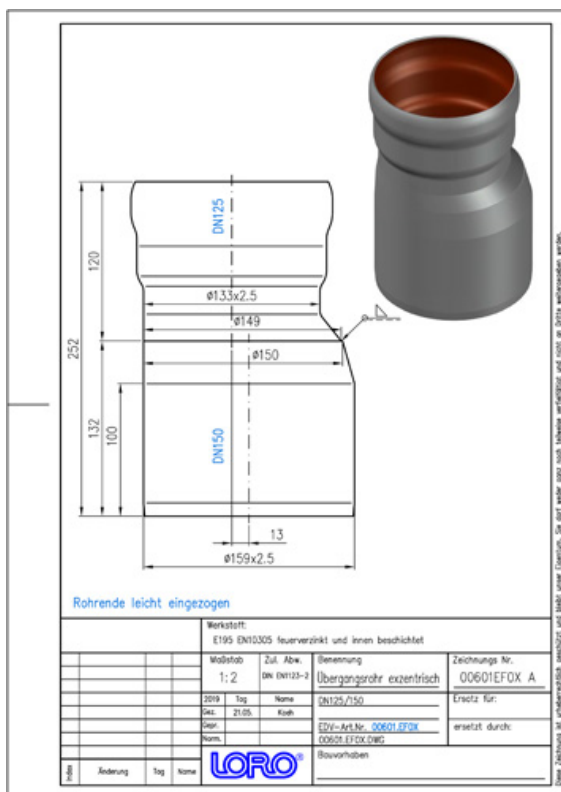

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)