

LORO-X TRANSITION PIPE ECCENTRIC

DN 125/150

LORO-X eccentric transition pipe DN 125/150

Opis

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150




Podaci o artiklu

EAN kod	4038088027523
ETIM klasa	EC003024
Nazivni promjer	DN 125, DN 150
Vanjske mjere (VxŠxD)	159 x 169 x 252 mm
Težina	2,40 Kg (STK)
Grupa proizvoda	1
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentrisch "nach unten" erfolgen.

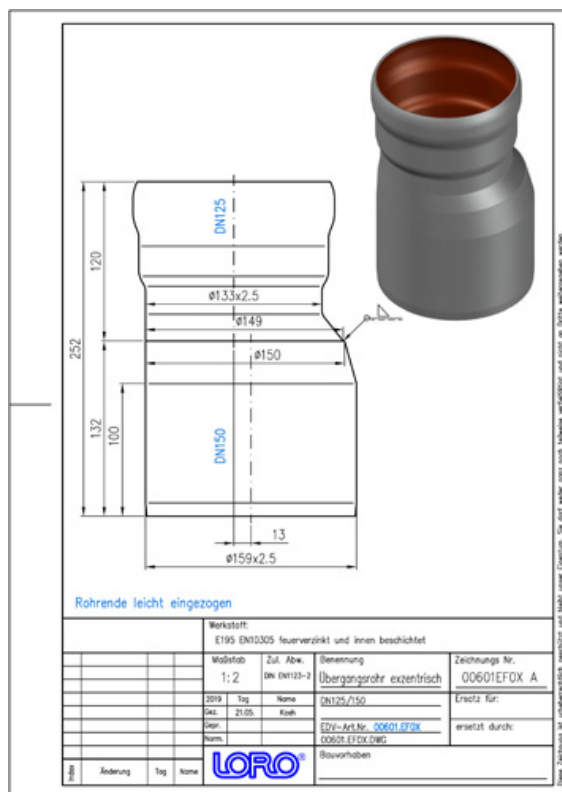

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

Certifikat (PDF)

BIM 3D (STEP)

[Dimenzijski crtež \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Prospekt \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)