

LORO-X TRANSITION PIPE ECCENTRIC

DN 125/150

LORO-X eccentric transition pipe DN 125/150

Beschrijving

LORO-X transition pipe, made of steel, hot-dip galvanized, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150




Artikelgegevens

EAN-code	4038088027523
ETIM Klasse	EC003024
Nominale diameter	DN 125, DN 150
Buitenafmetingen (HxBxL)	159 x 169 x 252 mm
Gewicht	2,40 Kg (STK)
Productgroep	1
Douanetariefnumme r	73089098

Materiaal / Kleur	Stahl feuerverzinkt, Silber
--------------------------	------------------------------------

Gebruiksaanwijzing

Gemäß EN 12056-3 7.6.1 ist bei Aufweitung in nahezu waagrecht verlegten Leitungen auf Rohrscheitelgleichheit zu achten. Die Aufweitung soll also exzentratisch "nach unten" erfolgen.

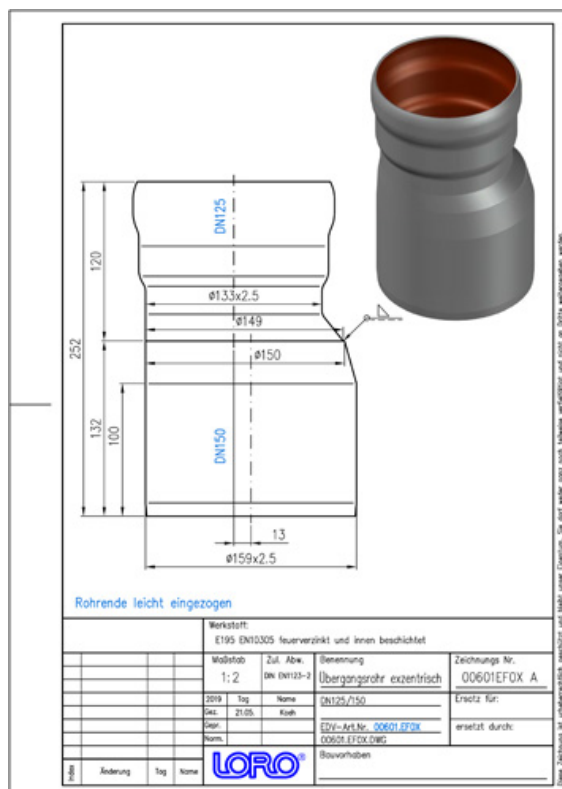

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

BIM 3D (STEP)

[Maattekening \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)