

LORO-X TRANSITION PIPE CONCENTRIC WITH EXTENSION DN 100/125

LORO-X concentric transition pipe with extended spigot DN 100/125

Opis

LORO-X transition pipe, made of steel, hot-dip galvanized, concentric, with extended peaked end, suitable for anchor clip art. no. 806X, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125




Dane artykułu

Kod EAN	4038088041291
Klasa ETIM	EC003024
Średnica nominalna	DN 100, DN 125
Wymiary zewnętrzne (WxSxD)	133 x 133 x 260 mm
Waga	1,80 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

LORO-X Übergangsrohre (konzentrische Red.-Stücke) mit verlängertem Spitzende, passend für Sicherungsschelle Nr.806X

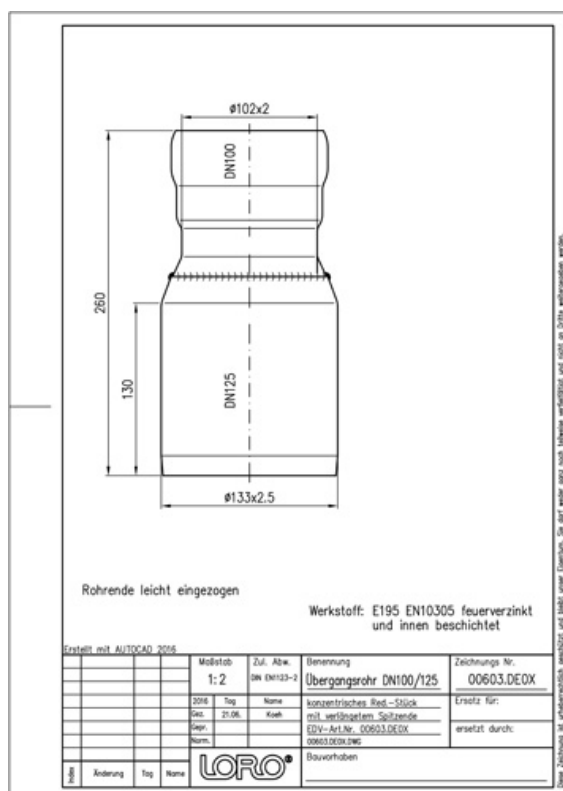

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)