

LORO-X TRANSITION PIPE CONCENTRIC WITH EXTENSION DN 100/125

LORO-X concentric transition pipe with extended spigot DN 100/125

Popis

LORO-X transition pipe, made of steel, hot-dip galvanized, concentric, with extended peaked end, suitable for anchor clip art. no. 806X, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/125




Údaje o článku

EAN kód	4038088041291
ETIM třída	EC003024
Jmenovitý průměr	DN 100, DN 125
Vnější rozměry (VxŠxD)	133 x 133 x 260 mm
Hmotnost	1,80 Kg (STK)
Skupina produktů	1
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

LORO-X Übergangsrohre (konzentrische Red.-Stücke)
mit verlängertem Spitzende, passend für
Sicherungsschelle Nr.806X

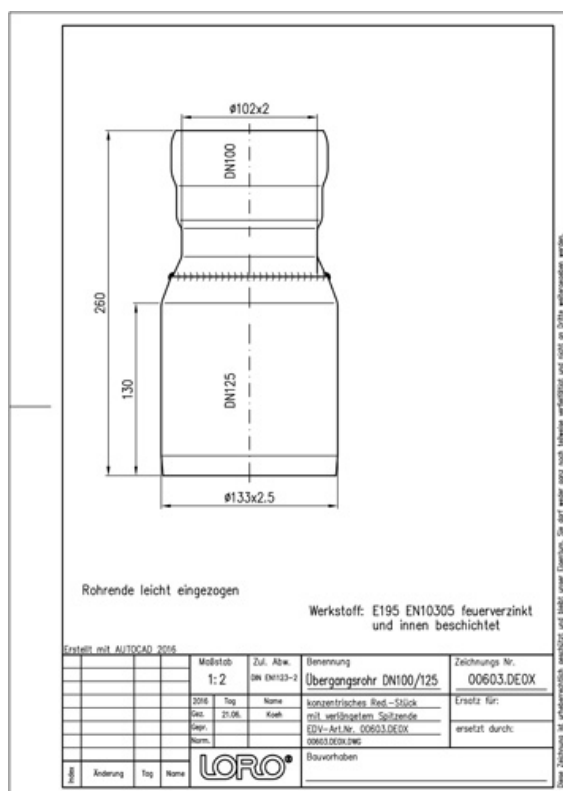

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[Certifikát \(PDF\)](#)

BIM 3D (STEP)

[Výkres rozměrů \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Prospekt \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)