

## LORO-X TRANSITION PIPE CONCENTRIC WITH EXTENSION DN 125/150

LORO-X concentric transition pipe with extended spigot DN 125/150

### Beskrivning

LORO-X transition pipe, made of steel, hot-dip galvanized, concentric, with extended peaked end, suitable for anchor clip art. no. 806X, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150




### Artikeldata

|                   |                             |
|-------------------|-----------------------------|
| EAN-kod           | 4038088041307               |
| ETIM-klass        | EC003024                    |
| Nominell diameter | DN 125, DN 150              |
| Ytermått (HxBxL)  | 159 x 159 x 250 mm          |
| Vikt              | 2,40 Kg (STK)               |
| Produktgrupp      | 1                           |
| Tullnummer        | 73089098                    |
| Material / Färg   | Stahl feuerverzinkt, Silber |

### Användningsanvisning

LORO-X Übergangsrohre (konzentrische Red.-Stücke) mit verlängertem Spitzende, passend für Sicherungsschelle Nr.806X

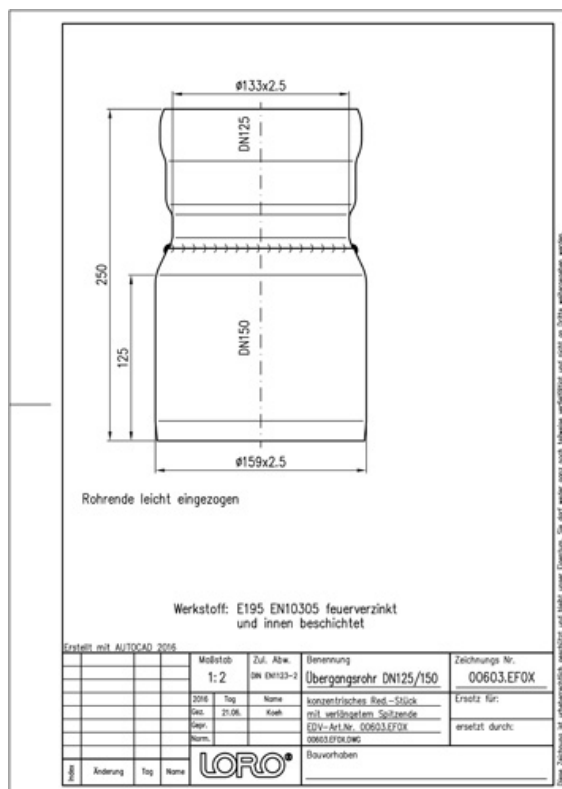

### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måttritning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)