

LORO-X TRANSITION PIPE CONCENTRIC WITH EXTENSION DN 125/150

LORO-X concentric transition pipe with extended spigot DN 125/150

Opis

LORO-X transition pipe, made of steel, hot-dip galvanized, concentric, with extended peaked end, suitable for anchor clip art. no. 806X, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/150




Podaci o artiklu

EAN kod	4038088041307
ETIM klasa	EC003024
Nazivni promjer	DN 125, DN 150
Vanjske mjere (VxŠxD)	159 x 159 x 250 mm
Težina	2,40 Kg (STK)
Grupa proizvoda	1
Carinski tarifni broj	73089098
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

LORO-X Übergangsrohre (konzentrische Red.-Stücke) mit verlängertem Spitzende, passend für Sicherungsschelle Nr.806X

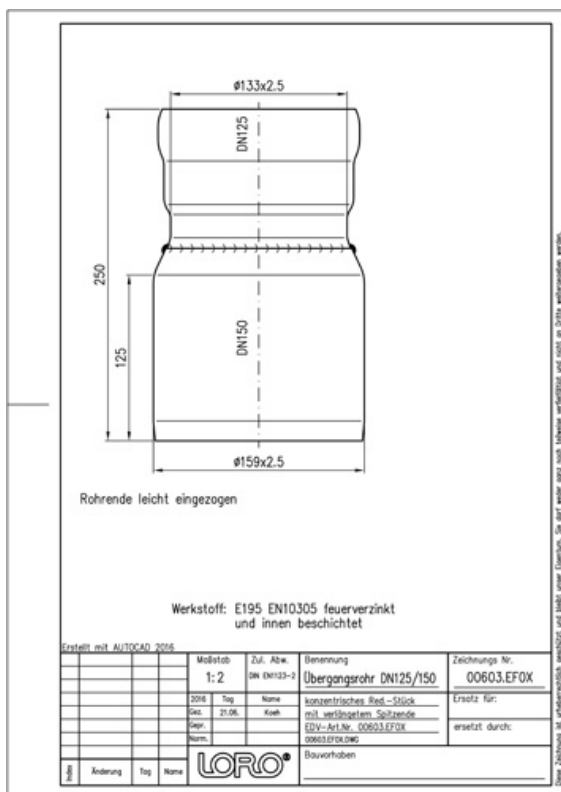

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)