

LORO-X ANSCHLUßST.VON LX DN 80 AN SML,

LORO-X connection piece from LX DN 80 to SML DN 80

Description

LORO-X connector made of steel, hot-dip galvanized, from LORO-X pipe DN 80 to SML pipe DN 80, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN 80/80




Article information

EAN Code	4038088076286
ETIM Class	EC003024
Nominal diameter	DN 80
Outside measurements (HxWxL)	102 x 102 x 160 mm
Weight	0,60 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

kein Verwendungshinweis notwendig

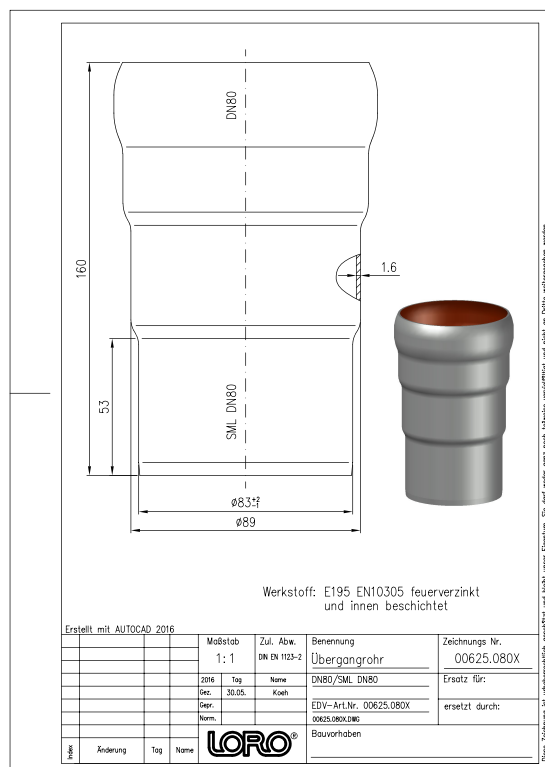

Downloads



Alles online

[Installation \(PDF\)](#)
[Certificate \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[CAD drawing \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)