

LORO-X ANSCHLUßST.VON LX DN 80 AN SML,

LORO-X connection piece from LX DN 80 to SML DN 80

Kuvaus

LORO-X connector made of steel, hot-dip galvanized, from LORO-X pipe DN 80 to SML pipe DN 80, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN 80/80




Tuotetiedot

EAN-koodi	4038088076286
ETIM-luokka	EC003024
Nimellishalkaisija	DN 80
Ulkomitat (KxLxS)	102 x 102 x 160 mm
Paino	0,60 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

kein Verwendungshinweis notwendig

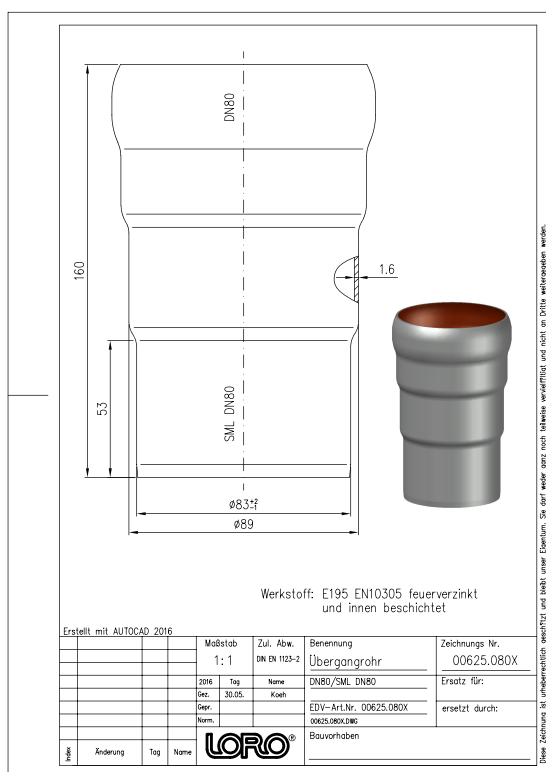

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Esite \(PDF\)](#)

[CAD 3D \(DWG\)](#)