
LORO-X ANSCHLUßST.VON LX DN 80 AN SML,

LORO-X connection piece from LX DN 80 to SML DN 80

Opis

LORO-X connector made of steel, hot-dip galvanized, from LORO-X pipe DN 80 to SML pipe DN 80, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN 80/80



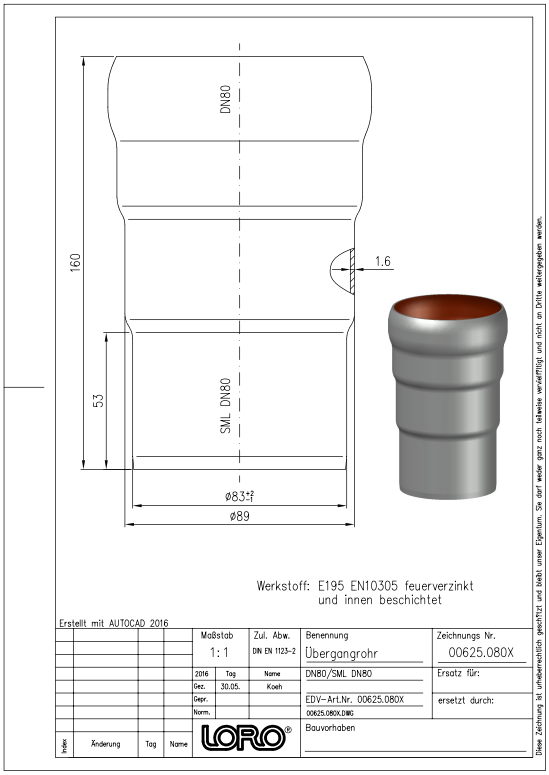

Dane artykułu

Kod EAN	**4038088076286**
Klasa ETIM	**EC003024**
Średnica nominalna	**DN 80**
Wymiary zewnętrzne (WxSxD)	**102 x 102 x 160 mm**
Waga	**0,60 Kg (STK)**
Grupa produktów	**1**
Numer taryfy celnej	**73089098**
Materiał / Kolor	**Stahl feuerverzinkt, Silber**

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

Pobieranie

Alles online

Instrukcja montażu (PDF)
Certyfikat (PDF)
BIM 3D (STEP)
Rysunek wymiarowy (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Broszura (PDF)
CAD 3D (DWG)