

LORO-X ADAPTOR FROM CAST-IRON/PVC SOCKET DN 100 TO LORO PIPE

LORO-X connection piece to SML+KA socket 100 DN 50

Description

LORO-X connector made of steel, hot-dip galvanized, from LORO-X pipe DN50 to plastic pipe socket DN100, SML pipe and pottery socket DN100, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN50/100




Données de l'article

Code EAN	4038088027776
Classe ETIM	EC003024
Diamètre nominal	DN 50
Dimensions extérieures (HxLxP)	110 x 110 x 188 mm
Poids	0,80 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

kein Verwendungshinweis notwendig

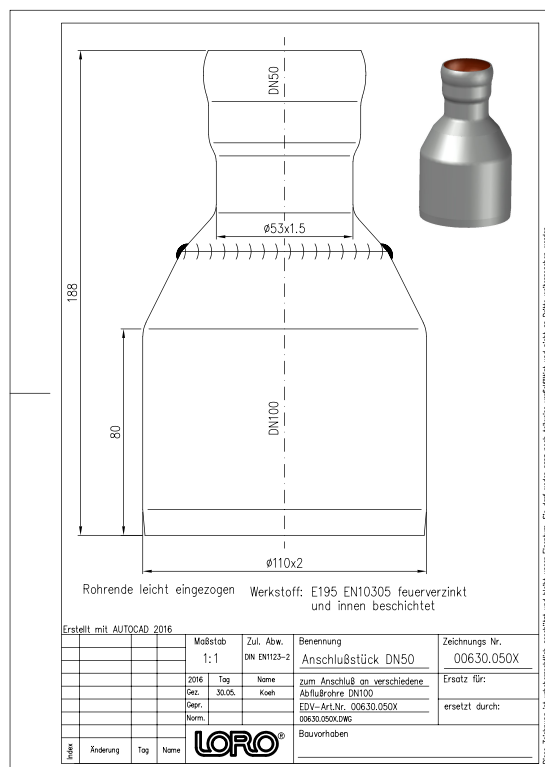

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

BIM 3D (STEP)

[Dessin dimensionnel \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM Revit (RFA)