

LORO-X ADAPTOR FROM CAST-IRON/PVC SOCKET DN 100 TO LORO PIPE

LORO-X connection piece to SML+KA socket 100 DN 80

Description

LORO-X connector made of steel, hot-dip galvanized, from LORO-X pipe DN 80 to SML pipe DN100 and plastic pipe socket DN100, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN 80/100




Article information

EAN Code	4038088027790
ETIM Class	EC003024
Nominal diameter	DN 80
Outside measurements (HxWxL)	110 x 110 x 180 mm
Weight	0,90 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

kein Verwendungshinweis notwendig

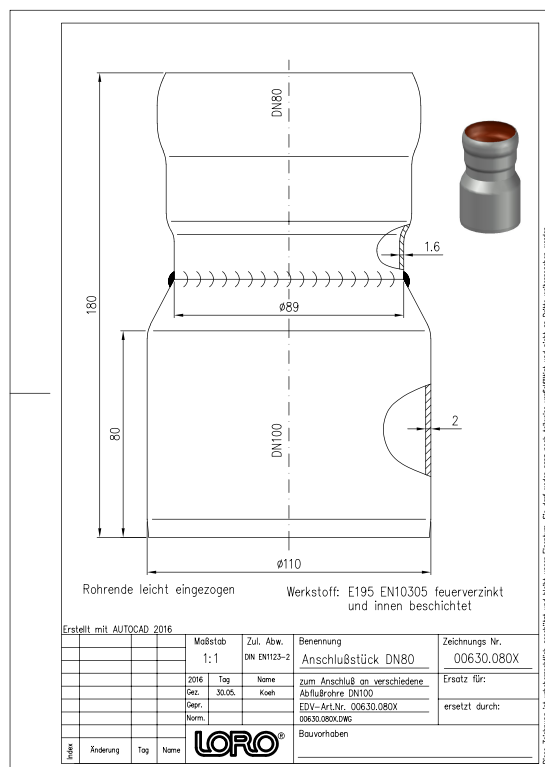

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD drawing \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)