

LORO-X ADAPTOR FROM CAST-IRON/PVC SOCKET DN 100 TO LORO PIPE

LORO-X connection piece to SML+KA socket 100 DN 80

Description

LORO-X connector made of steel, hot-dip galvanized, from LORO-X pipe DN 80 to SML pipe DN100 and plastic pipe socket DN100, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN 80/100




Données de l'article

Code EAN	4038088027790
Classe ETIM	EC003024
Diamètre nominal	DN 80
Dimensions extérieures (HxLxP)	110 x 110 x 180 mm
Poids	0,90 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

kein Verwendungshinweis notwendig

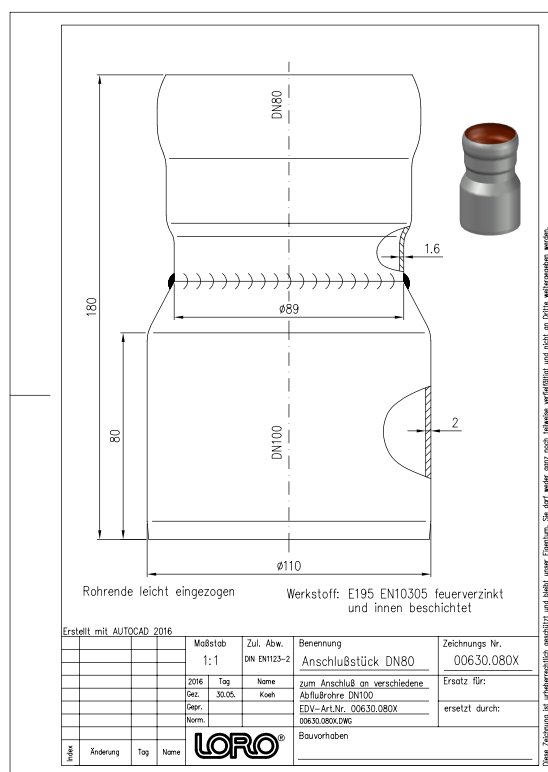

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM Revit \(RFA\)](#)