

LX-ANSCHLUßST.M.KURZMU.A.KA-MU 100,

LORO-X connection piece with short sleeve to KA-socket 100 DN 100

Opis

LORO-X connector with short socket made of steel, hot-dip galvanized, from LORO-X pipe DN100 to plastic pipe socket DN100, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN100/100



Dane artykułu

Kod EAN 4038088104781

Klasa ETIM EC003024

Średnica nominalna DN 100

Wymiary zewnętrzne 118 x 118 x 98 mm (WxSxD)

Waga 0,50 Kg (STK)


Grupa produktów 1

Numer taryfy celnej 73089098

Materiał / Kolor Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

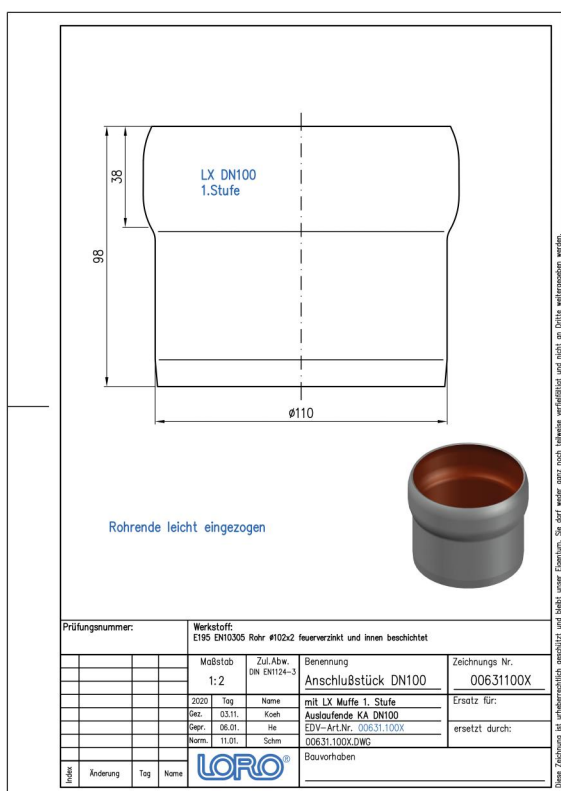

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)