
LX-ANSCHLUßST.M.KURZMU.A.KA-MU.125,

LORO-X connection piece with short socket to KA socket 125 DN 125

Voce di capitolato

LORO-X connector with short socket made of steel, hot-dip galvanized, from LORO-X pipe DN125 to plastic pipe socket DN125, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/125



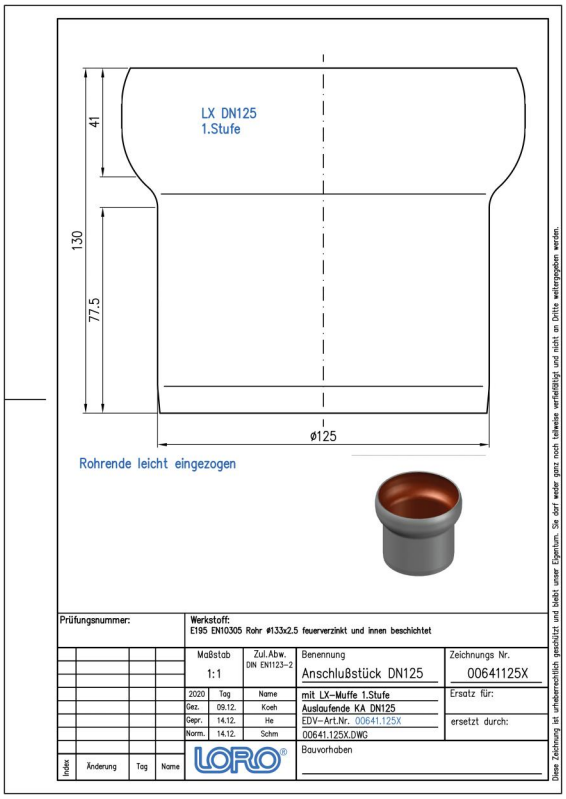

Dati articolo

Codice EAN	**4038088104798**
Classe ETIM	**EC003024**
Diametro nominale	**DN 125**
Misure esterne (AxLxP)	**151 x 151 x 130 mm**
Peso	**1,10 Kg (STK)**
Gruppo prodotti	**1**
Numero tariffa doganale	**73089098**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

kein Verwendungshinweis notwendig

Download

Alles online

Istruzioni di installazione (PDF)
Certificato (PDF)
BIM 3D (STEP)
Disegno dimensionale (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Brochure (PDF)
CAD 3D (DWG)