

## LX-ANSCHLUßST.M.KURZMU.A.KA-MU.125,

LORO-X connection piece with short socket to KA socket 125 DN 125

### Descripción

LORO-X connector with short socket made of steel, hot-dip galvanized, from LORO-X pipe DN125 to plastic pipe socket DN125, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/125




### Datos del artículo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088104798               |
| Clase ETIM                 | EC003024                    |
| Diámetro nominal           | DN 125                      |
| Medidas exteriores (AxAxL) | 151 x 151 x 130 mm          |
| Peso                       | 1,10 Kg (STK)               |
| Grupo de productos         | 1                           |
| Número de arancel aduanero | 73089098                    |
| Material / Color           | Stahl feuerverzinkt, Silber |

### Nota de uso

kein Verwendungshinweis notwendig

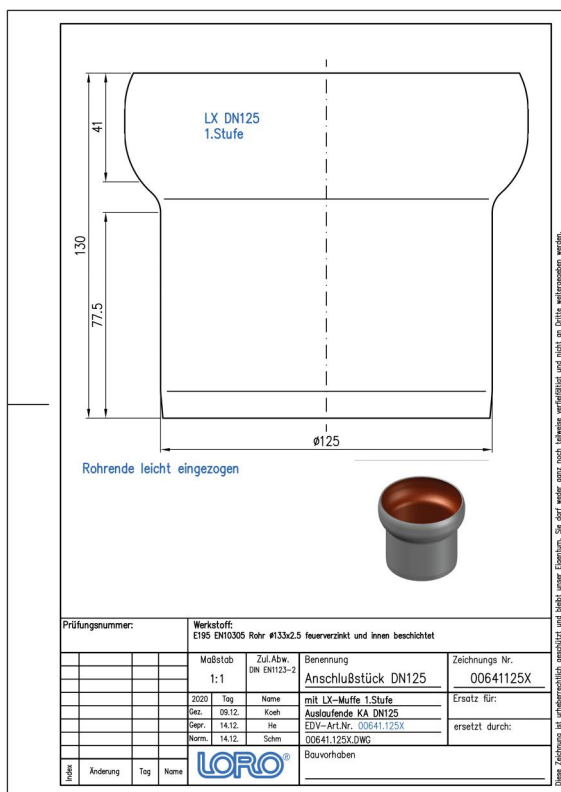

### Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)

[Certificado \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dibujo dimensional \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Folleto \(PDF\)](#)

[CAD 3D \(DWG\)](#)