

LORO-X ANSCHLUßSTÜCK KA-MU 250/LX-ML 125

LORO-X connection piece KA socket 250/LX-ML 125 eccentric form 2

Opis

LORO-X connector made of steel, hot-dip galvanized, from LORO-X pipe DN125 to plastic pipe socket DN250, eccentric, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN125/250




Dane artykułu

Kod EAN	4038088085738
Klasa ETIM	EC003024
Średnica nominalna	DN 125
Wymiary zewnętrzne (WxSxD)	273 x 273 x 264 mm
Waga	6,30 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

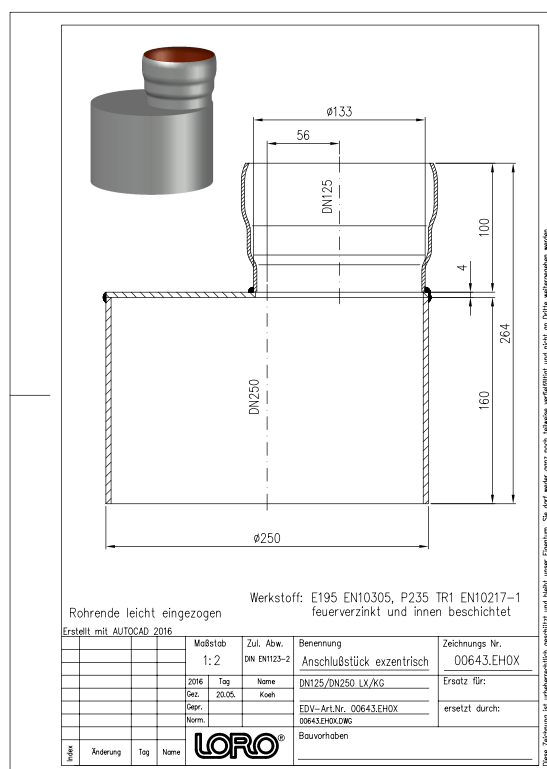

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)