## LORO-X SLIP IN SOCKET WITH LONG SOCKET DN 50

**LORO-X push-in sleeve DN 50**

### Description

LORO-X slip-in socket made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, DN50

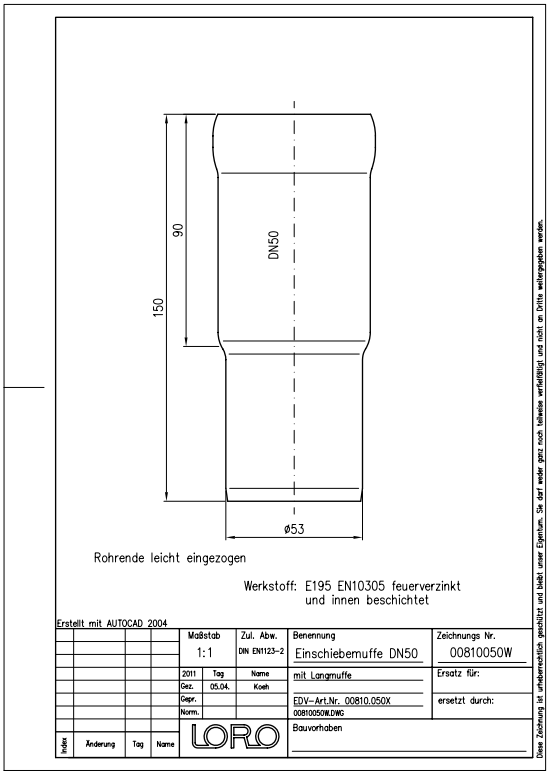


### Données de l'article

| | |
|---|---|
| Code EAN | 4038088029084 |
| Classe ETIM | EC003024 |
| Diamètre nominal | DN 50 |
| Dimensions extérieures (HxLxP) | 63 x 63 x 150 mm |
| Poids | 0,30 Kg (STK) |
| Groupe de produits | 1 |
| Numéro tarifaire douanier | 73089098 |
| Matériau / Couleur | Stahl feuerverzinkt, Silber |

### Note d'utilisation

Für die Rohrmontage zwischen 2 Fixpunkten bietet die Langmuffe eine größere Einschubtiefe als Längenausgleich. Sie ersetzt keinen dauerhaften Kompensator für die Längenausdehnung, da Gleitmittel und Dichtelement nach kurzer Zeit eine feste Verbindung herstellen.

### Téléchargements

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD (DWG)

Alles online