


## LORO-X PIPE WITH 1 SOCKET 3000 MM DN 50

### LORO-X pipe 1 socket 3000 mm DN 50

#### Description

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 3000 mm, + 1socket, DN50

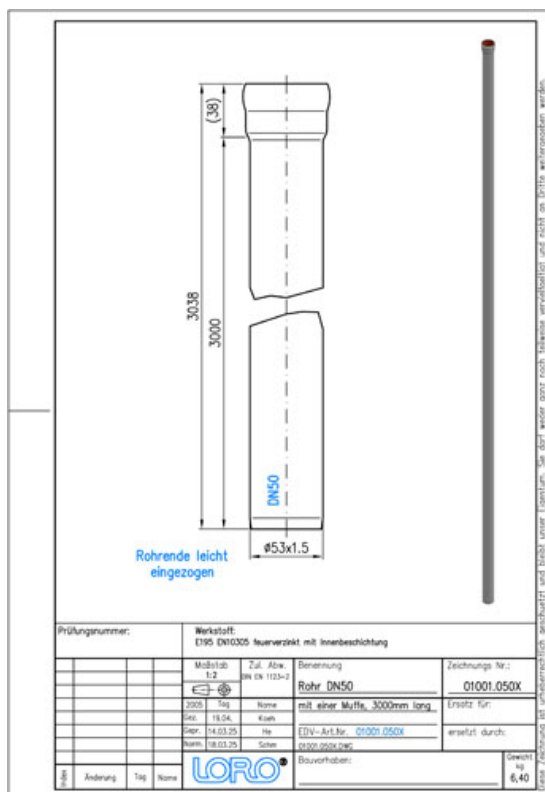

#### Article information

|                              |                             |
|------------------------------|-----------------------------|
| EAN Code                     | 4038088004739               |
| ETIM Class                   | EC011386                    |
| Nominal diameter             | DN 50                       |
| Nominal length/degree        | 3000                        |
| Outside measurements (HxWxL) | 63 x 63 x 3038 mm           |
| Weight                       | 6,40 Kg (STK)               |
| Product group                | 1                           |
| Customs tariff number        | 73063012                    |
| Material / Color             | Stahl feuerverzinkt, Silber |

#### Usage note

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

#### Downloads



Alles online

[Installation \(PDF\)](#)
[Certificate \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[CAD drawing \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisch\)](#)
[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)