


LORO-X PIPE WITH 1 SOCKET 3000 MM DN 50

LORO-X pipe 1 socket 3000 mm DN 50

Description

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 3000 mm, + 1socket, DN50

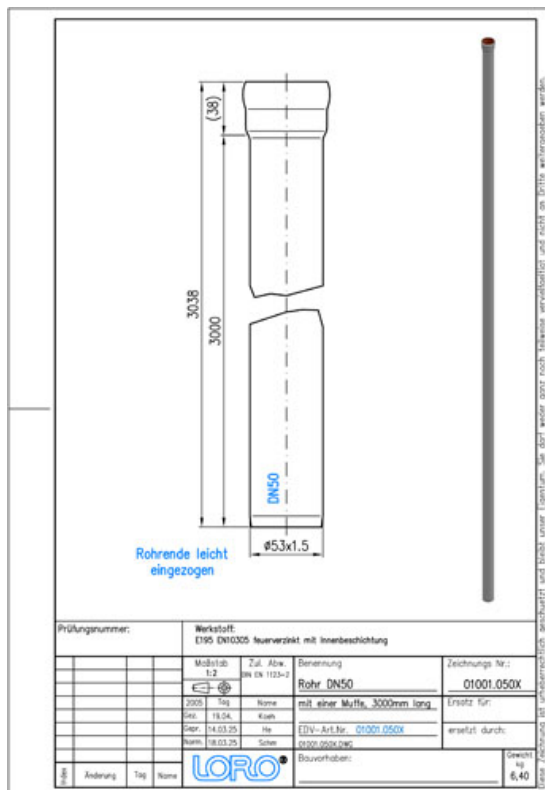

Données de l'article

Code EAN	4038088004739
Classe ETIM	EC011386
Diamètre nominal	DN 50
Longueur/degré nominal	3000
Dimensions extérieures (HxLxP)	63 x 63 x 3038 mm
Poids	6,40 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	73063012
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

BIM 3D (STEP)

BIM Revit (RFA)

[Dessin dimensionnel \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)