

## LORO-X PIPE WITH 1 SOCKET 3000 MM DN 100

### LORO-X pipe 1 socket 3000 mm DN 100

#### Beskrivelse

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 3000 mm, + 1socket, DN100




#### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088004777               |
| ETIM-klasse           | EC011386                    |
| Nominell diameter     | DN 100                      |
| Nominell lengde/grad  | 3000                        |
| Utvendige mål (HxBxL) | 118 x 118 x 3070 mm         |
| Vekt                  | 15,60 Kg (STK)              |
| Produktgruppe         | 1                           |
| Tolltariffnummer      | 73063012                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

#### Bruksanvisning

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

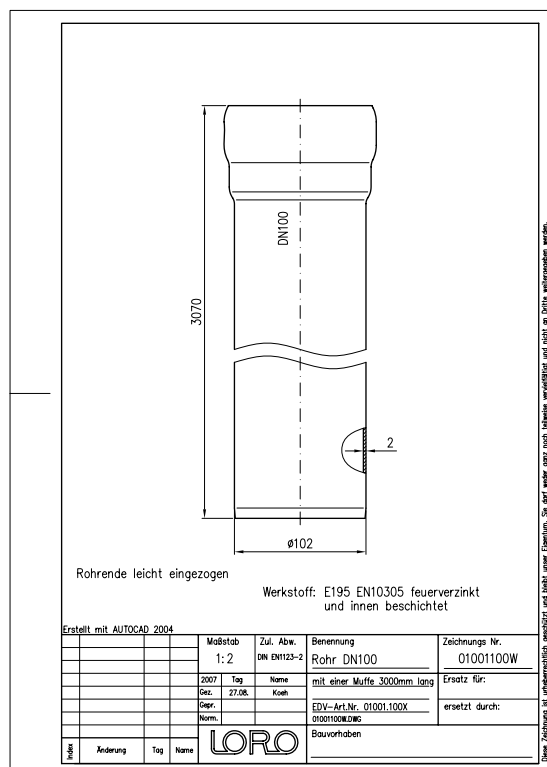

#### Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkjenning \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Måltegning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Brosjyre \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)