

LORO-X PIPE WITH 1 SOCKET 3000 MM DN 125

LORO-X pipe 1 socket 3000 mm DN 125

Kuvaus

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 3000 mm, + 1socket, DN125




Tuotetiedot

EAN-koodi	4038088004784
ETIM-luokka	EC011386
Nimellishalkaisija	DN 125
Nimellispituus/-aste	3000
Ulkomitat (KxLxS)	152 x 152 x 3075 mm
Paino	27,40 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73063018
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

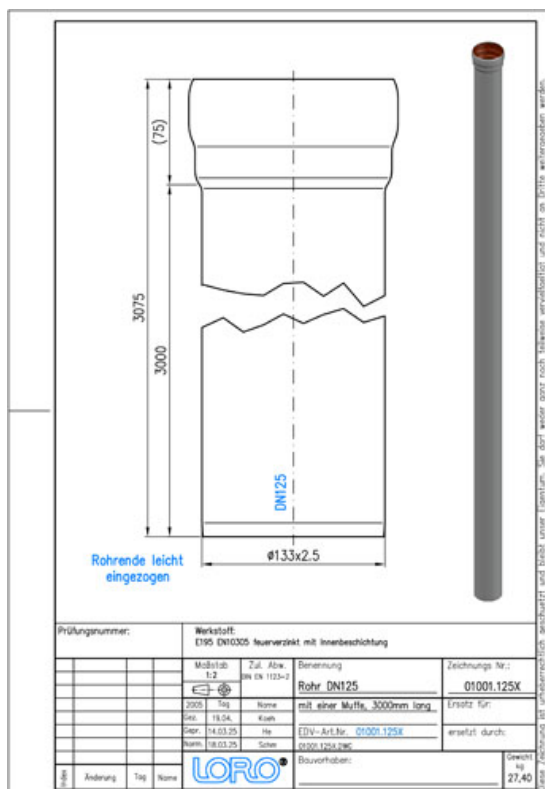

Lataukset



Alles online

[Asennusohje \(PDF\)](#)
[Hyväksyntä \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Mittapiirustus \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Esite \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)