


LORO-X PIPE WITH 1 SOCKET 3000 MM DN 125

LORO-X pipe 1 socket 3000 mm DN 125

Popis

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 3000 mm, + 1socket, DN125

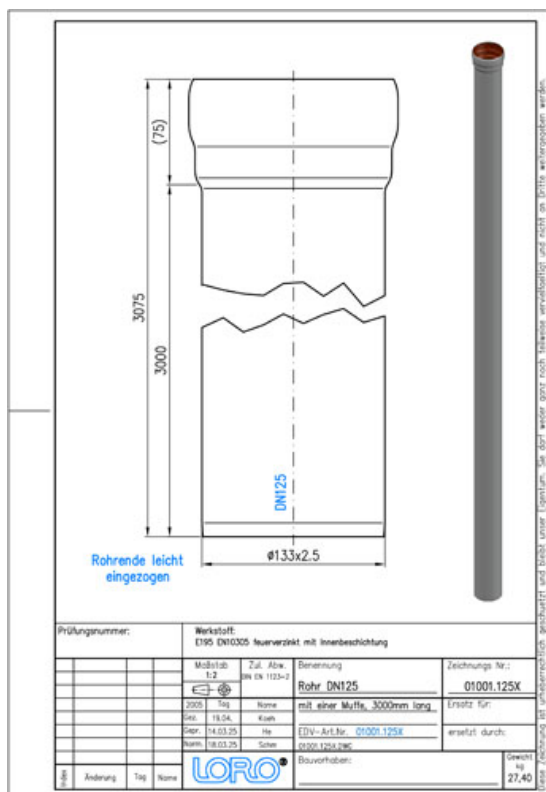

Údaje o artikli

EAN kód	4038088004784
ETIM trieda	EC011386
Menovitý priemer	DN 125
Menovitá dĺžka/stupeň	3000
Vonkajšie rozmery (VxŠxH)	152 x 152 x 3075 mm
Hmotnosť	27,40 Kg (STK)
Skupina produktov	1
Colný sadzobník	73063018
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)