## LORO-X PIPE WITH 1 SOCKET 2500 MM DN 50

**LORO-X pipe 1 socket 2500 mm DN 50**

### Beschrijving

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 2500 mm, + 1socket, DN50

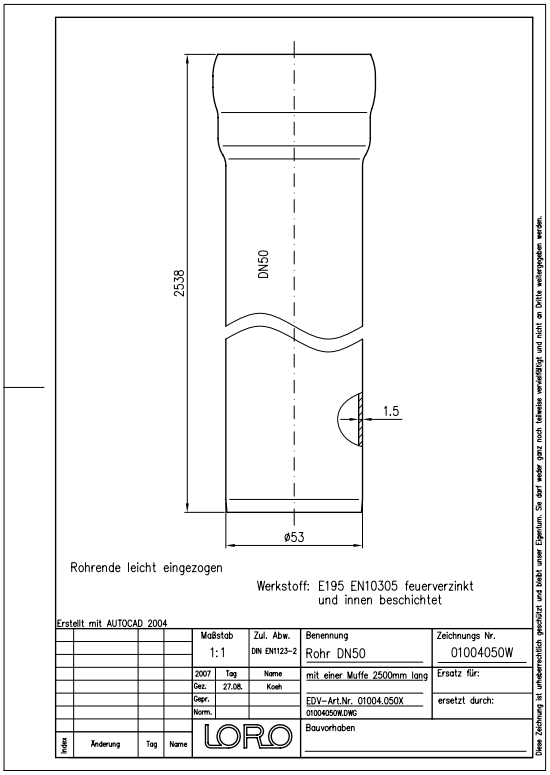


### Artikelgegevens

| | |
|---|---|
| EAN-code | **4038088004999** |
| ETIM Klasse | **EC011386** |
| Nominale diameter | **DN 50** |
| Nominale lengte/graad | **2500** |
| Buitenafmetingen (HxBxL) | **63 x 63 x 2538 mm** |
| Gewicht | **5,40 Kg (STK)** |
| Productgroep | **1** |
| Douanetariefnummer | **73063012** |
| Materiaal / Kleur | **Stahl feuerverzinkt, Silber** |

### Gebruiksaanwijzing

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden.Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

### Downloads

Alles online

Installatiehandleiding (PDF)
Certificaat (PDF)
BIM IFC4 (parametrisch)
Maattekening (PDF)
CAD 2D (DXF)
BIM Revit (RFA)
Brochure (PDF)
CAD (DWG)