

## LORO-X PIPE WITH 1 SOCKET 2750 MM DN 100

### LORO-X pipe 1 socket 2750 mm DN 100

#### Descrizione

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 2750 mm, + 1socket, DN100




#### Dati articolo

|                          |                             |
|--------------------------|-----------------------------|
| Codice EAN               | 4038088005101               |
| Classe ETIM              | EC011386                    |
| Diametro nominale        | DN 100                      |
| Lunghezza/grado nominale | 2750                        |
| Misure esterne (AxLxP)   | 118 x 118 x 2820 mm         |
| Peso                     | 15,30 Kg (STK)              |
| Gruppo prodotti          | 1                           |
| Numero tariffa doganale  | 73063012                    |
| Materiale / Colore       | Stahl feuerverzinkt, Silber |

#### Note d'uso

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

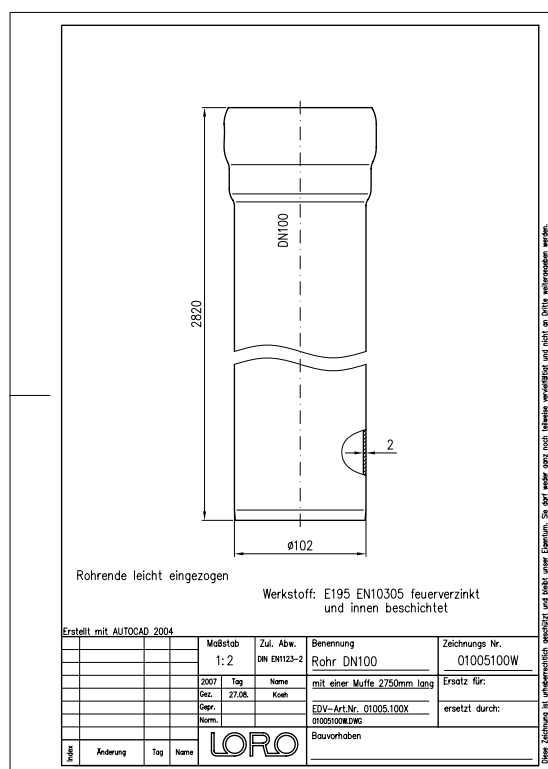

#### Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[Certificato \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Disegno dimensionale \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametric\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)