## LORO-X PIPE WITH 1 SOCKET 2750 MM DN 125

**LORO-X pipe 1 socket 2750 mm DN 125**

### Beschrijving

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 2750 mm, + 1socket, DN125

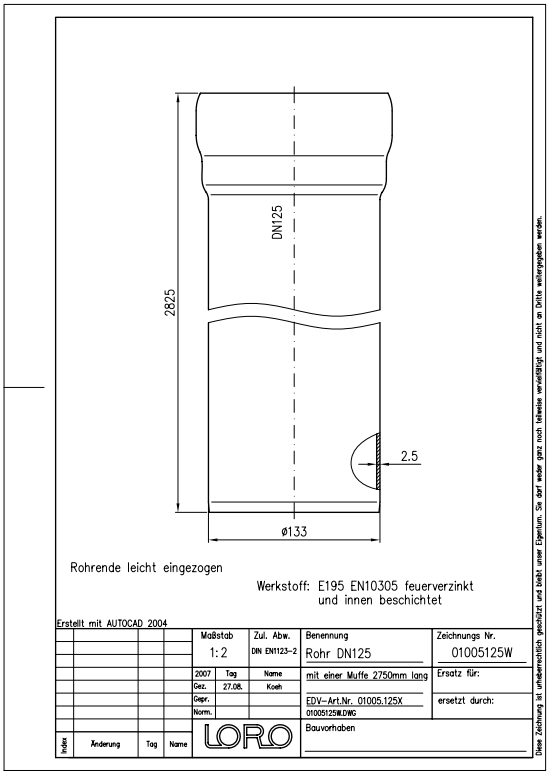


### Artikelgegevens

| | |
|---|---|
| EAN-code | **4038088005118** |
| ETIM Klasse | **EC011386** |
| Nominale diameter | **DN 125** |
| Nominale lengte/graad | **2750** |
| Buitenafmetingen (HxBxL) | **152 x 152 x 2825 mm** |
| Gewicht | **23,00 Kg (STK)** |
| Productgroep | **1** |
| Douanetariefnummer | **73063018** |
| Materiaal / Kleur | **Stahl feuerverzinkt, Silber** |

### Gebruiksaanwijzing

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden.Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

### Downloads

Alles online

- Installatiehandleiding (PDF)
- Certificaat (PDF)
- BIM IFC4 (parametrisch)
- Maattekening (PDF)
- CAD 2D (DXF)
- BIM Revit (RFA)
- Brochure (PDF)
- CAD (DWG)