LORO-X ROHRMUFFENL.O.IBESCH.3000MM DN250

LORO-X pipe socketless without internal coating 3000 mm DN 250

Texte de prescription

LORO-XML pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, approval no. Z-42.1-346 from DIBt, 3000 mm, without socket, without internal coating, DN250

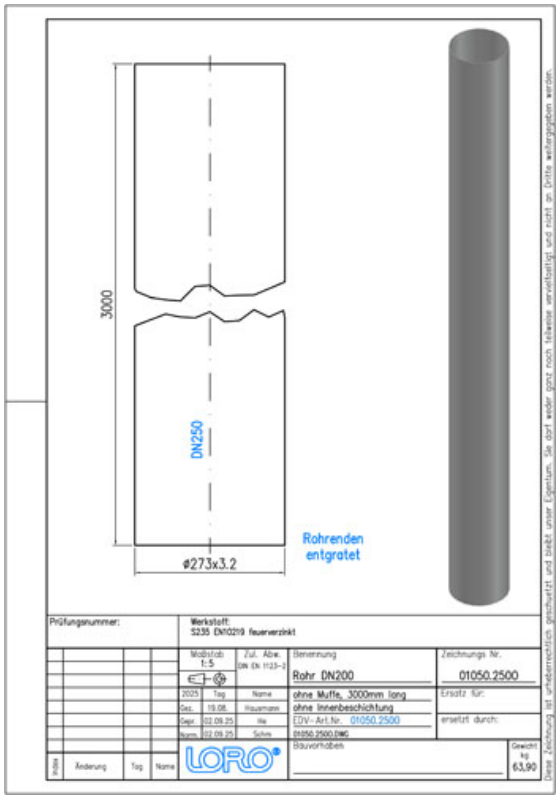

Données de l'article

Code EAN	**4038088109885**
Classe ETIM	**EC011386**
Diamètre nominal	**DN 250**
Longueur/degré nominal	**3000**
Dimensions extérieures (HxLxP)	**273 x 273 x 3000 mm**
Poids	**63,90 Kg (STK)**
Groupe de produits	**1**
Numéro tarifaire douanier	**73063012**
Matériau / Couleur	**Stahl feuerverzinkt, Silber**

Note d'utilisation

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

Téléchargements

Alles online

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM IFC4 (parametrisch)
BIM 3D (IFC)