# LORO-X PIPE WITHOUT SOCKET 3000 MM DN 250

**LORO-X pipe socketless 3000 mm DN 250**

## Kuvaus

LORO-XML pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, approval no. Z-42.1-346 from DIBt, 3000 mm, without socket, DN250

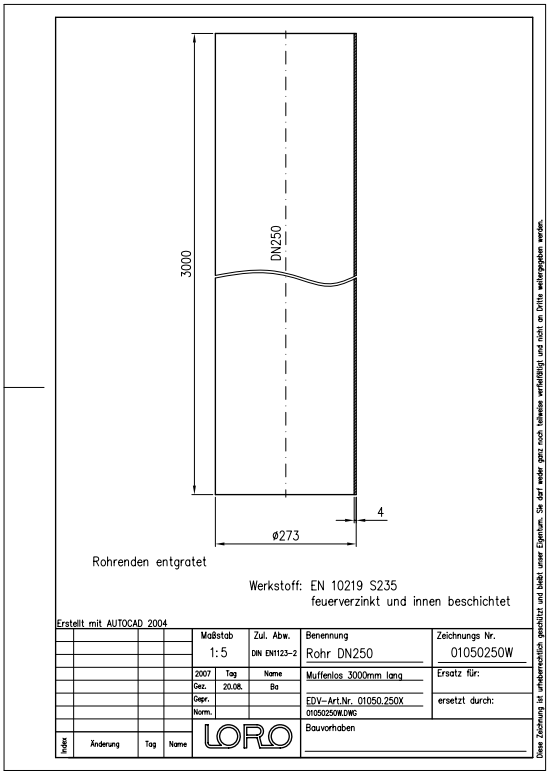


## Tuotetiedot

| | |
|---|---|
| EAN-koodi | 4038088068045 |
| ETIM-luokka | EC011386 |
| Nimellishalkaisija | DN 250 |
| Nimellispituus/-aste | 3000 |
| Ulkomitat (KxLxS) | 273 x 273 x 3000 mm |
| Paino | 75,00 Kg (STK) |
| Tuoteryhmä | 1 |
| Tullitariffin numero | 73063018 |
| Materiaali / Väri | Stahl feuerverzinkt, Silber |

## Käyttöohje

LORO-XML Stahlabflussrohre muffenlos in DN 250 und DN 300, aus Stahl, feuerverzinkt.Für große Nennweiten hat LORO muffenlose Stahlabflussrohrsysteme für die Regenentwässerung in DN 250 und DN 300 mit bauaufsichtlicher Zulassung Nr. Z-42.1-346 vom DIBt in sein Entwässerungsprogramm aufgenommen.Durch die Verwendung einer muffenlosen Verbindung wird die Verlegung mit einem CV-Verbinder für große Nennweiten wesentlich vereinfacht.

## Lataukset

Alles online

Asennusohje (PDF)
Hyväksyntä (PDF)
BIM IFC4 (parametrisch)
Mittapiirustus (PDF)
CAD 2D (DXF)
Esite (PDF)
CAD (DWG)