

## LORO-X PIPE WITH 1 SOCKET 2000 MM DN 50

**LORO-X pipe 1 socket 2000 mm DN 50**

## Beskrivning

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 2000 mm, + 1socket, DN50




## Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088005491               |
| ETIM-klass          | EC011386                    |
| Nominell diameter   | DN 50                       |
| Nominell längd/grad | 2000                        |
| Yttermått (HxBxL)   | 63 x 63 x 2038 mm           |
| Vikt                | 4,30 Kg (STK)               |
| Produktgrupp        | 1                           |
| Tullnummer          | 73063012                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

## Användningsanvisning

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

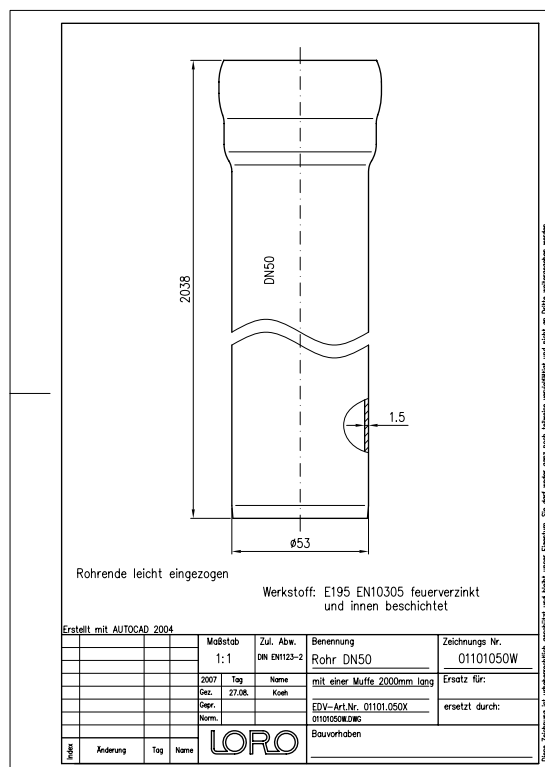

## Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

BIM IFC4 (parametrisch)

[Måttitning \(PDF\)](#)

CAD 2D (DXF)

BIM Revit (RFA)

[Broschyr \(PDF\)](#)

CAD (DWG)