LORO-X RAINWATER PIPE WITH REDUCED PIPE END

LORO-X pipe with reducing push-fit connection 1500 mm DN 70

Description

LORO-X reducing push-fit rainfall downpipe, made of steel, hot-dip galvanized, round, without socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 1500 mm, DN70

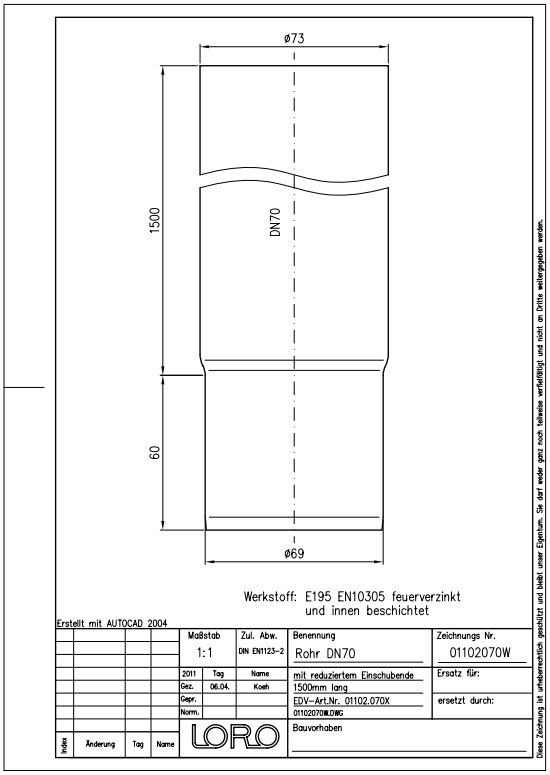

Données de l'article

Code EAN	**4038088005590**
Classe ETIM	**EC011386**
Diamètre nominal	**DN 70**
Longueur/degré nominal	**1500**
Dimensions extérieures (HxLxP)	**73 x 73 x 1560 mm**
Poids	**4,40 Kg (STK)**
Groupe de produits	**1**
Numéro tarifaire douanier	**73063012**
Matériau / Couleur	**Stahl feuerverzinkt, Silber**

Note d'utilisation

LORO-X Red.-Steck Regenfallrohre ohne Dichtelement bilden eine gradlinige Fallleitung vor der Fassade, ohne sichtbare Muffenverbindungen, insbesondere für die außenliegende Attikaentwässerung und vorgehängte Rundrinnen bzw. Kastenrinnen.Der Übergang von LORO-X Stahlabflussrohr oder von waagerechten Ablaufrohren von LORO-X Attikaabläufen erfolgt z.B. mit dem LORO-X Red.-Steck Anschlussstück.Als "senkrecht" wird eine Fallleitung bis zu einem Gefälle von 10 Grad zur waagerechten bzw. 180mm/m angegeben. Da Red.-Steck Verbindungen nicht rückstausicher sind, ist eine waagerechte Verlegung nicht zulässig.

Téléchargements

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD (DWG)

Alles online