LORO-X RAINWATER PIPE WITH REDUCED PIPE END

LORO-X pipe with Red.-plug connection 1500 mm DN 80

Beschrijving

LORO-X reducing push-fit rainfall downpipe, made of steel, hot-dip galvanized, round, without socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 1500 mm, DN 80

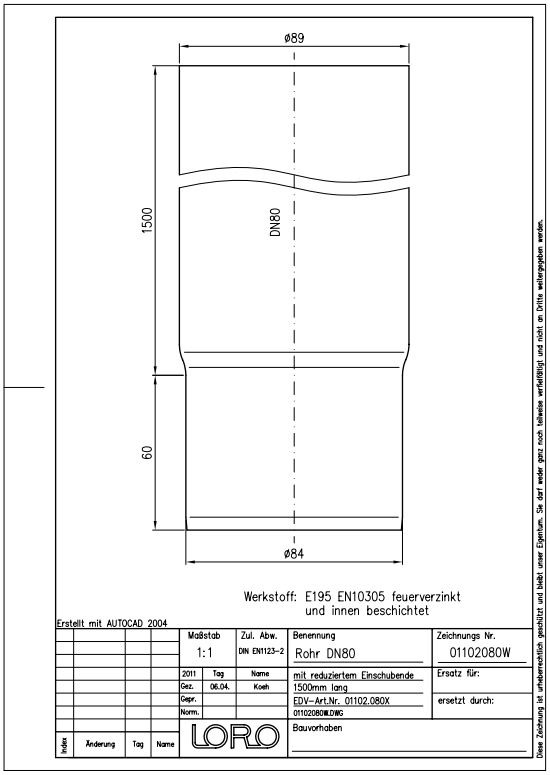

Artikelgegevens

EAN-code	**4038088005606**
ETIM Klasse	**EC011386**
Nominale diameter	**DN 80**
Nominale lengte/graad	**1500**
Buitenafmetingen (HxBxL)	**89 x 89 x 1560 mm**
Gewicht	**5,40 Kg (STK)**
Productgroep	**1**
Douanetariefnummer	**73063012**
Materiaal / Kleur	**Stahl feuerverzinkt, Silber**

Gebruiksaanwijzing

LORO-X Red.-Steck Regenfallrohre ohne Dichtelement bilden eine gradlinige Fallleitung vor der Fassade, ohne sichtbare Muffenverbindungen, insbesondere für die außenliegende Attikaentwässerung und vorgehängte Rundrinnen bzw. Kastenrinnen.Der Übergang von LORO-X Stahlabflussrohr oder von waagerechten Ablaufrohren von LORO-X Attikaabläufen erfolgt z.B. mit dem LORO-X Red.-Steck Anschlussstück.Als "senkrecht" wird eine Fallleitung bis zu einem Gefälle von 10 Grad zur waagerechten bzw. 180mm/m angegeben. Da Red.-Steck Verbindungen nicht rückstausicher sind, ist eine waagerechte Verlegung nicht zulässig.

Downloads

Alles online

Installatiehandleiding (PDF)
Certificaat (PDF)
Maattekening (PDF)
CAD 2D (DXF)
Brochure (PDF)
CAD (DWG)