## LORO-X RAINWATER PIPE WITH REDUCED PIPE END

**LORO-X pipe with Red.-plug connection 2000 mm DN 80**

### Descriere

LORO-X reducing push-fit rainfall downpipe, made of steel, hot-dip galvanized, round, without socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 2000 mm, DN 80

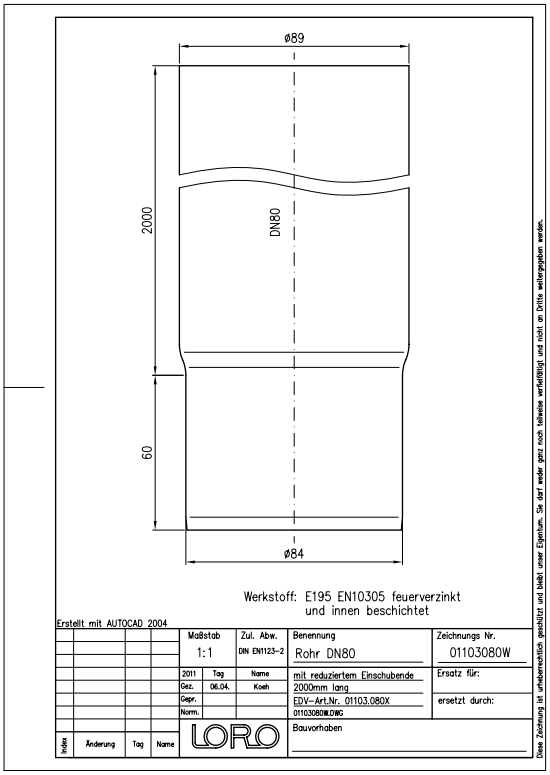


### Date articol

| | |
|---|---|
| Cod EAN | **4038088005637** |
| Clasă ETIM | **EC011386** |
| Diametru nominal | **DN 80** |
| Lungime/grad nominal | **2000** |
| Dimensiuni exterioare (ÎxLxA) | **89 x 89 x 2060 mm** |
| Greutate | **8,00 Kg (STK)** |
| Grupă de produse | **1** |
| Număr tarif vamal | **73063012** |
| Material / Culoare | **Stahl feuerverzinkt, Silber** |

### Notă de utilizare

LORO-X Red.-Steck Regenfallrohre ohne Dichtelement bilden eine gradlinige Fallleitung vor der Fassade, ohne sichtbare Muffenverbindungen, insbesondere für die außenliegende Attikaentwässerung und vorgehängte Rundrinnen bzw. Kastenrinnen.Der Übergang von LORO-X Stahlabflussrohr oder von waagerechten Ablaufrohren von LORO-X Attikaabläufen erfolgt z.B. mit dem LORO-X Red.-Steck Anschlussstück.Als "senkrecht" wird eine Fallleitung bis zu einem Gefälle von 10 Grad zur waagerechten bzw. 180mm/m angegeben. Da Red.-Steck Verbindungen nicht rückstausicher sind, ist eine waagerechte Verlegung nicht zulässig.

### Descărcări

Alles online

Instrucțiuni de montaj (PDF)
Desen CAD (PDF)
Broșură (PDF)
Certificat (PDF)
CAD 2D (DXF)
CAD (DWG)