LORO-X RAINWATER PIPE WITH REDUCED PIPE END

LORO-X pipe with Red.-plug connection 3000 mm DN 80

Opis

LORO-X reducing push-fit rainfall downpipe, made of steel, hot-dip galvanized, round, without socket, with reduced pipe end, building material class A1, dimensionally stable, break-proof, 3000 mm, DN 80

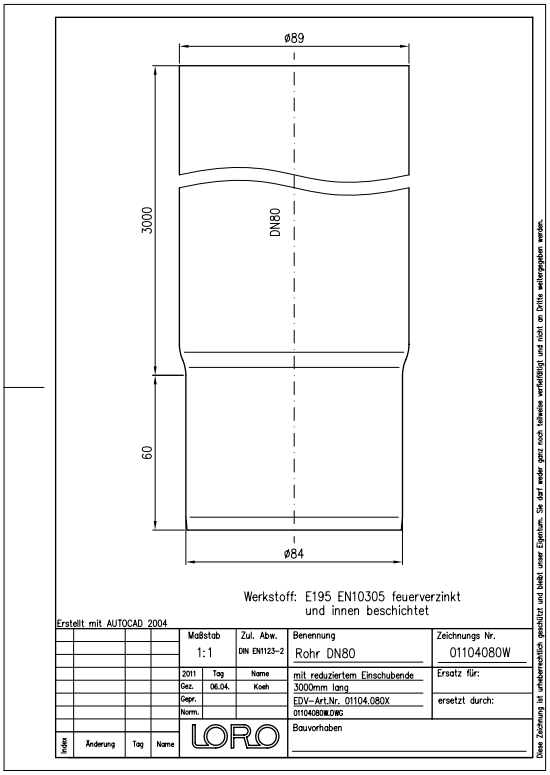

Dane artykułu

Kod EAN	**4038088005675**
Klasa ETIM	**EC011386**
Średnica nominalna	**DN 80**
Długość/stopień nominalny	**3000**
Wymiary zewnętrzne (WxSxD)	**89 x 89 x 3060 mm**
Waga	**12,00 Kg (STK)**
Grupa produktów	**1**
Numer taryfy celnej	**73063012**
Materiał / Kolor	**Stahl feuerverzinkt, Silber**

Wskazówki dotyczące użytkowania

LORO-X Red.-Steck Regenfallrohre ohne Dichtelement bilden eine gradlinige Fallleitung vor der Fassade, ohne sichtbare Muffenverbindungen, insbesondere für die außenliegende Attikaentwässerung und vorgehängte Rundrinnen bzw. Kastenrinnen.Der Übergang von LORO-X Stahlabflussrohr oder von waagerechten Ablaufrohren von LORO-X Attikaabläufen erfolgt z.B. mit dem LORO-X Red.-Steck Anschlussstück.Als "senkrecht" wird eine Fallleitung bis zu einem Gefälle von 10 Grad zur waagerechten bzw. 180mm/m angegeben. Da Red.-Steck Verbindungen nicht rückstausicher sind, ist eine waagerechte Verlegung nicht zulässig.

Pobieranie

Alles online

Instrukcja montażu (PDF)
Rysunek wymiarowy (PDF)
Broszura (PDF)
Certyfikat (PDF)
CAD 2D (DXF)
CAD (DWG)