

## LORO-X PIPE WITH 1 SOCKET 1500 MM DN 125

**LORO-X pipe 1 socket 1500 mm DN 125**

## Popis

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 1500 mm, + 1socket, DN125




## Údaje o artikli

|                           |                             |
|---------------------------|-----------------------------|
| EAN kód                   | 4038088005965               |
| ETIM trieda               | EC011386                    |
| Menovitý priemer          | DN 125                      |
| Menovitá dĺžka/stupeň     | 1500                        |
| Vonkajšie rozmery (VxŠxH) | 152 x 152 x 1575 mm         |
| Hmotnosť                  | 12,50 Kg (STK)              |
| Skupina produktov         | 1                           |
| Colný sadzovník           | 73063018                    |
| Materiál / Farba          | Stahl feuerverzinkt, Silber |

## Pokyny na použitie

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

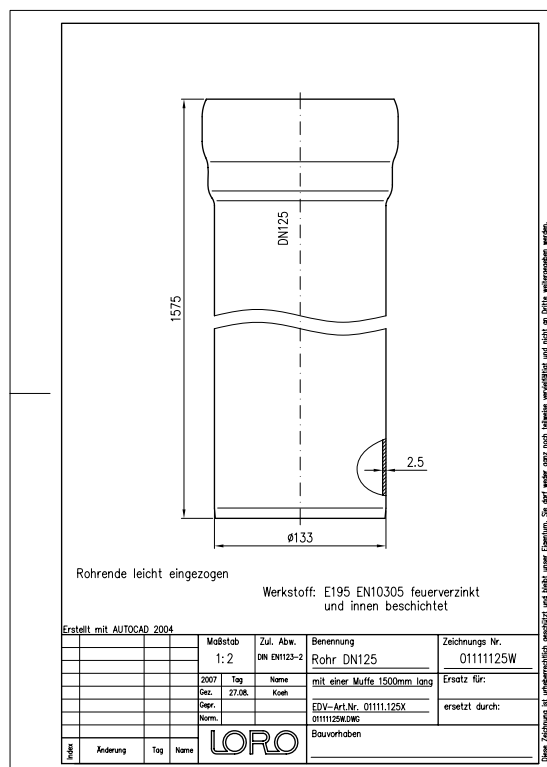

## Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

BIM IFC4 (parametrisch)

[Rozmerový výkres \(PDF\)](#)

CAD 2D (DXF)

BIM Revit (RFA)

[Prospekt \(PDF\)](#)

CAD (DWG)