

## LORO-X PIPE WITH 1 SOCKET 1000 MM DN 50

### LORO-X pipe 1 socket 1000 mm DN 50

#### Beschrijving

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 1000 mm, + 1socket, DN50




#### Artikelgegevens

|                          |                             |
|--------------------------|-----------------------------|
| EAN-code                 | 4038088006214               |
| ETIM Klasse              | EC011386                    |
| Nominale diameter        | DN 50                       |
| Nominale lengte/graad    | 1000                        |
| Buitenafmetingen (HxBxL) | 63 x 63 x 1038 mm           |
| Gewicht                  | 2,20 Kg (STK)               |
| Productgroep             | 1                           |
| Douanetariefnumme        | 73063012                    |
| r                        |                             |
| Materiaal / Kleur        | Stahl feuerverzinkt, Silber |

#### Gebruiksaanwijzing

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

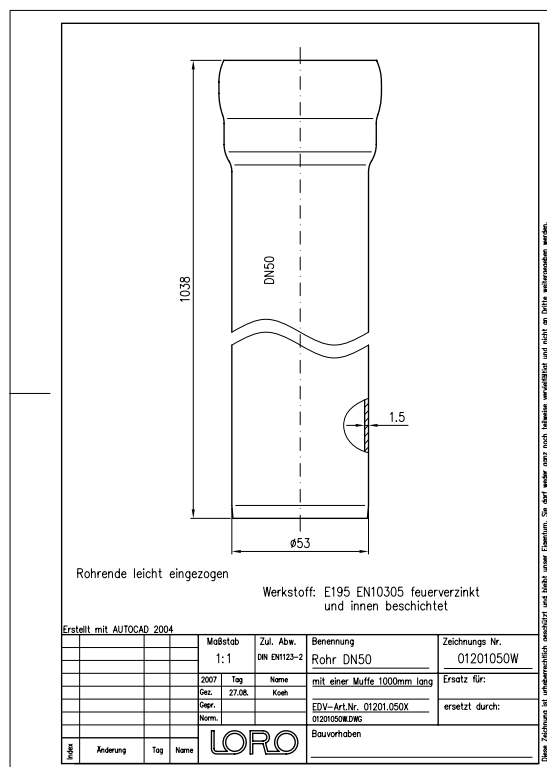

#### Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)
[Certificaat \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Maattekening \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisch\)](#)
[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)