

LORO-X PIPE WITH 1 SOCKET 500 MM DN 125

LORO-X pipe 1 socket 500 mm DN 125

Beskrivning

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 500 mm + 1socket, DN125




Artikeldata

EAN-kod	4038088006696
ETIM-klass	EC011386
Nominell diameter	DN 125
Nominell längd/grad	500
Yttermått (HxBxL)	152 x 152 x 575 mm
Vikt	4,80 Kg (STK)
Produktgrupp	1
Tullnummer	73063018
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

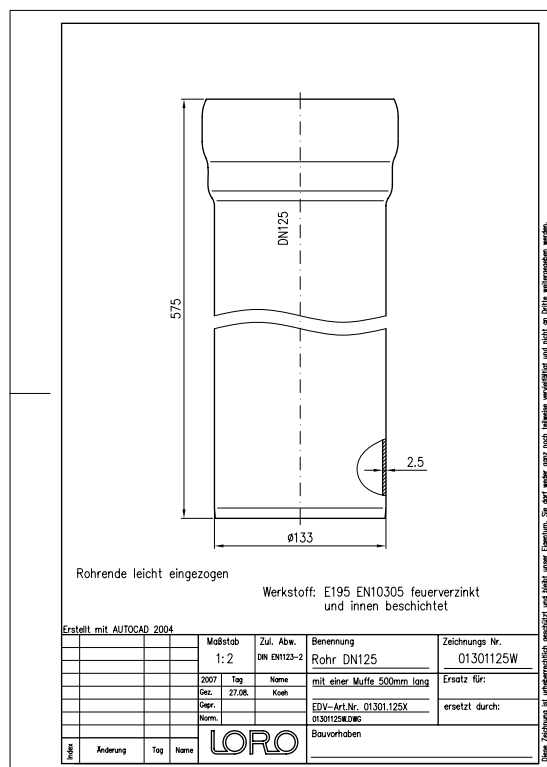

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkännande \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Måttitning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Broschyr \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)