

LORO-X PIPE WITH 1 SOCKET 500 MM DN 125

LORO-X pipe 1 socket 500 mm DN 125

Kuvaus

LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 500 mm + 1socket, DN125




Tuotetiedot

EAN-koodi	4038088006696
ETIM-luokka	EC011386
Nimellishalkaisija	DN 125
Nimellispituus/-aste	500
Ulkomitat (KxLxS)	152 x 152 x 575 mm
Paino	4,80 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73063018
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Die Nenn-Länge (l) der Rohre wird ohne Länge der Muffe angegeben und kann daher zum Auszählen der Rohre in zusammengestecktem Zustand herangezogen werden. Beispiel: Nenn-Länge 1000 mm + 70 mm Muffe = 1070 mm Rohr-Außenmaß.

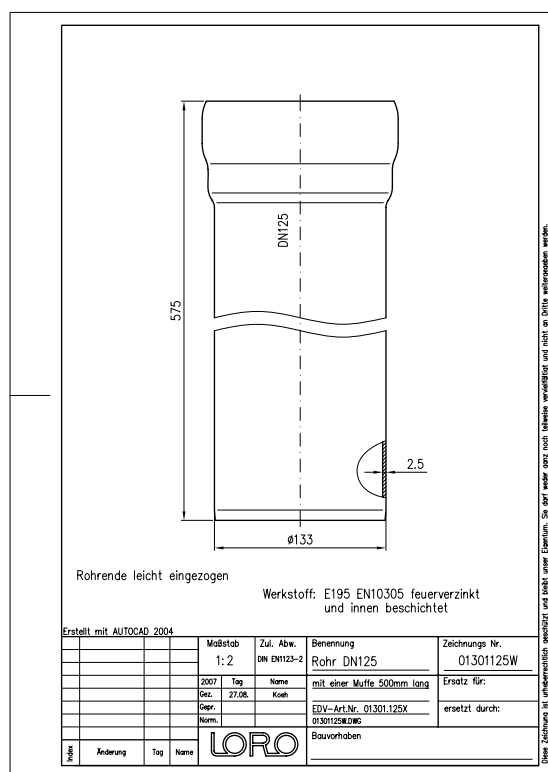

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Esite \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)